MiniBooNE

Steve Brice
Fermilab

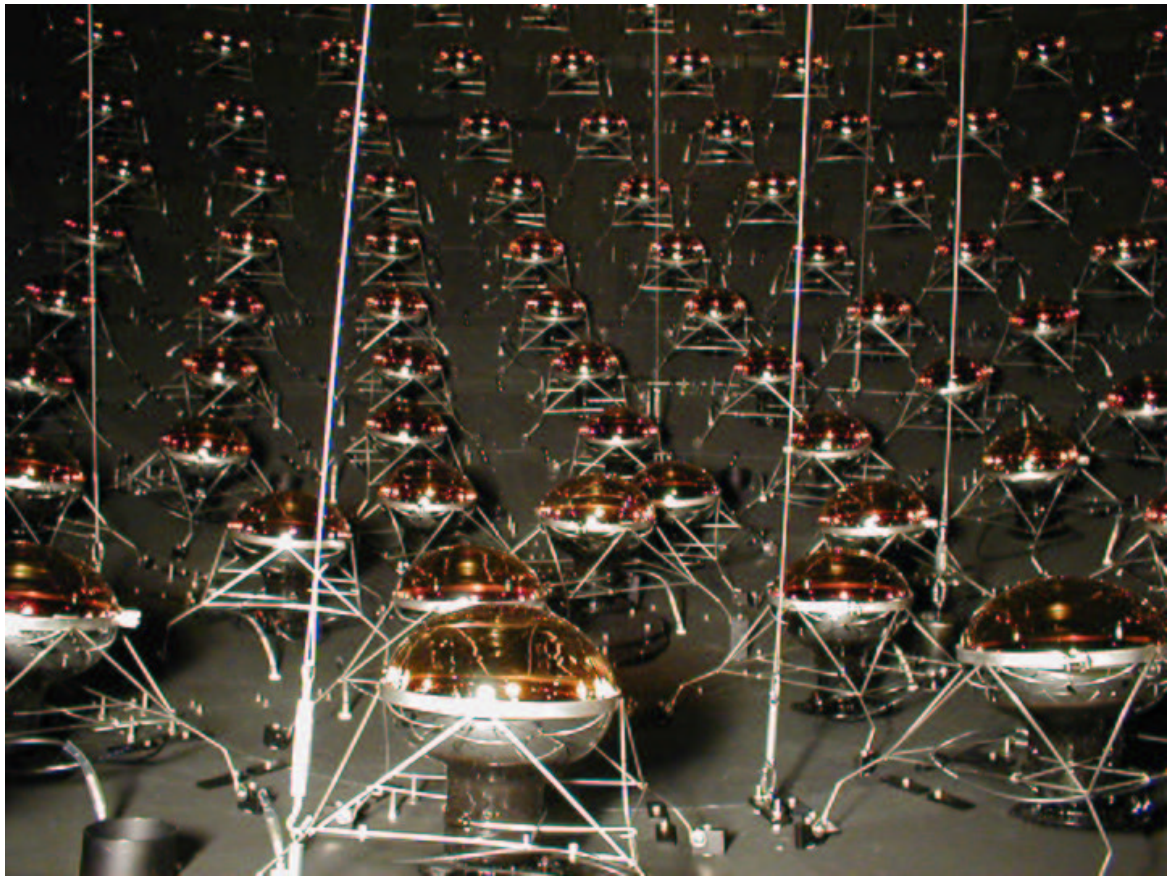

Overview

MiniBooNE Beam

MiniBooNE Detector

Neutrino Analyses

Summary

Current Oscillation Signals

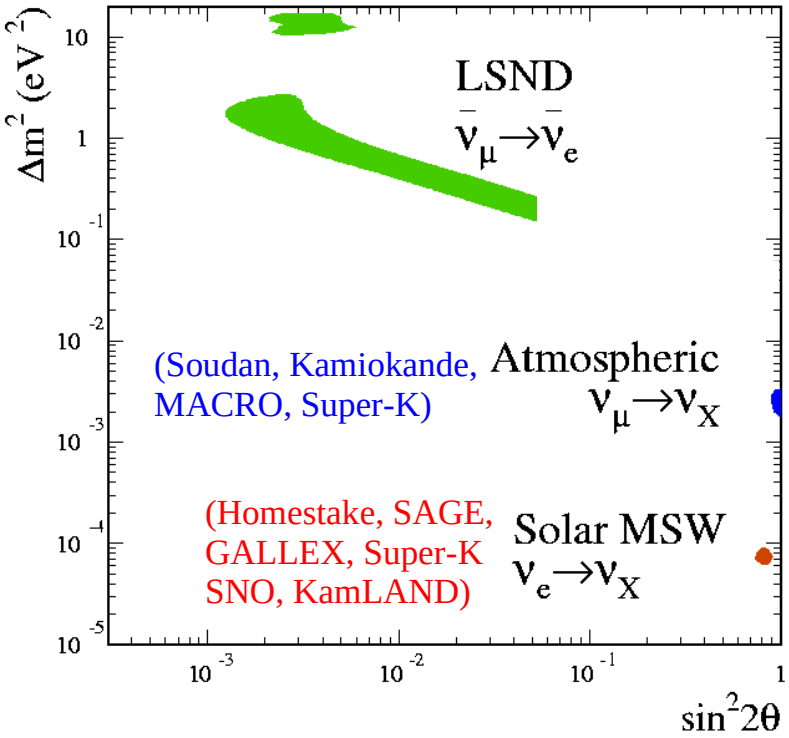

- Unconfirmed
  - Δm^2_{LSND}~ 0.1-10 eV^2
- Well established measurements
  - Δm^2_{atm} ~ 2 - 3 x 10^{-3} eV^2
  - Δm^2_{solar} ~ 7 x 10^{-5} eV^2

Implications

- 3 active, light neutrinos (Z width from LEP)
- But $\Delta m^2_{solar} + \Delta m^2_{atm} \neq \Delta m^2_{LSND}$
- If all 3 measurements are oscillations something fundamental has to give
- Sterile neutrino(s) are one possibility
  - add extra neutrino flavours, but don't allow them to interact weakly
- Also affects offaxis sensitivity

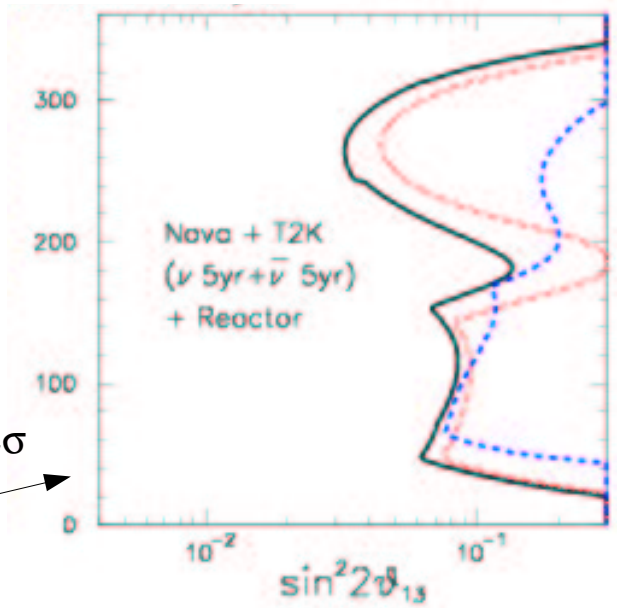

Sensitivity to exclude Null CP signal at 2σ
Black: No MiniBooNE Signal
Red: if CPC MiniBooNE signal
Blue: if CPV MiniBooNE signal

The LSND Result

- LSND:
  - Excess of $\bar{\nu}_e$ events in a $\bar{\nu}_\mu$ beam
  - 87.9 ± 22.4 ± 6.0 over background
  - ~4σ evidence for ν oscillation

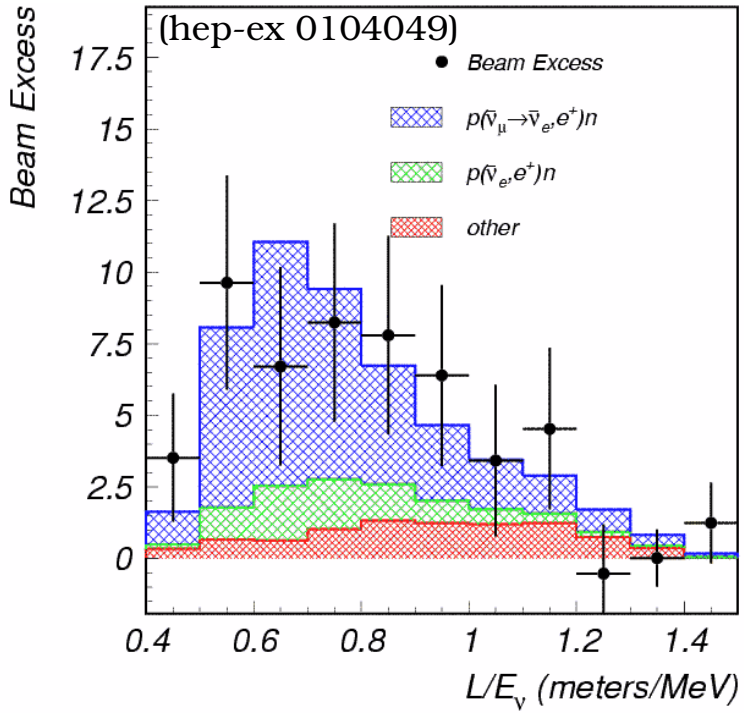

- To Check LSND you want
  - Experiment with
    - different systematics
    - higher statistics
    - similar L/E
- → MiniBooNE

The Collaboration

Y.Liu, I.Stancu
University of Alabama

S.Koutsoliotas
Bucknell University

E.Church, G.J.VanDalen
University of California, Riverside

E.Hawker, R.A.Johnson, J.L.Raaf
University of Cincinnati

T.Hart, R.H.Nelson, E.D.Zimmerman
University of Colorado

A.A.Aguilar-Arevalo, L.Bugel,
J. M. Conrad, J. Link, J. Monroe,
D.Schmitz, M. H. Shaevitz,
M. Sorel, G. P. Zeller
Columbia University

D.Smith
Embry Riddle Aeronautical University

L.Bartoszek, C.Bhat, S.J.Brice, B.C.Brown, D.A.Finley, B.T.Fleming, R.Ford, F.G.Garcia, P.Kasper, T.Kobilarcik, I.Kourbanis, A.Malensek, W.Marsh, P.Martin, F.Mills, C.Moore, P.Nienaber, E.Prebys, A.D.Russell, P.Spentzouris, R.Stefanski, T.Williams
Fermi National Accelerator Laboratory

D.C.Cox, A.Green, H. -O.Meyer, R.Tayloe
Indiana University

G.T.Garvey, C.Green, W.C.Louis, G.A.McGregor, S.McKenney, G.B.Mills, V.Sandberg, B.Sapp, R.Schirato, R.Van de Water, N.L.Walbridge, D. H. White
Los Alamos National Laboratory

R.Imlay, W.Metcalf, M.Sung, M.Wascko
Louisiana State University

J.Cao, Y.Liu, B.P.Roe
University of Michigan

A.O.Bazarko, P.D.Meyers, R.B.Patterson, F.C.Shoemaker, H.A.Tanaka
Princeton University

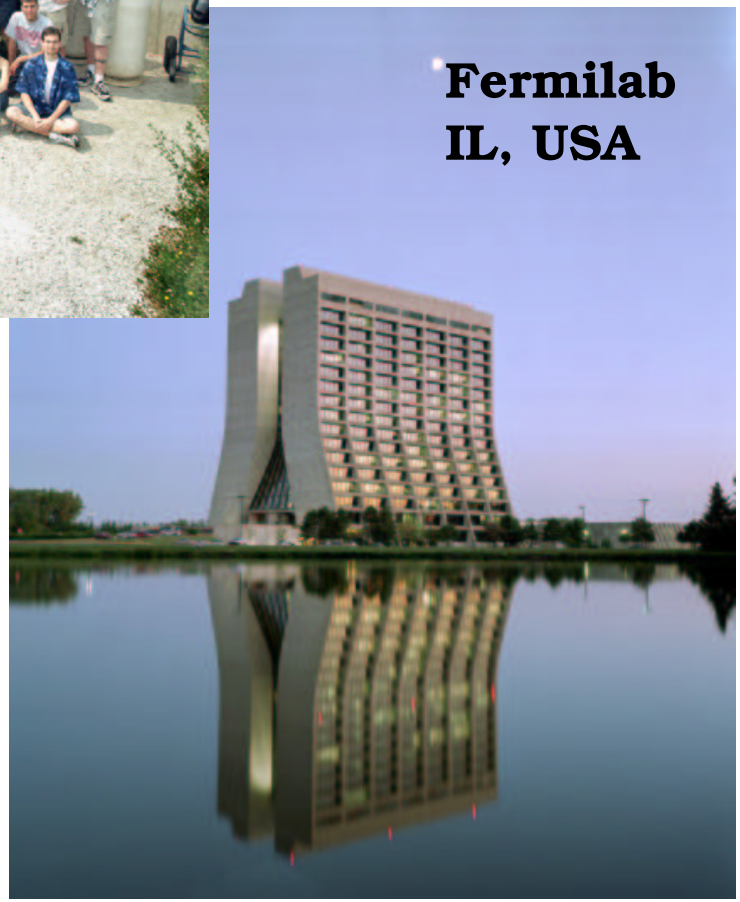

MiniBooNE Goal

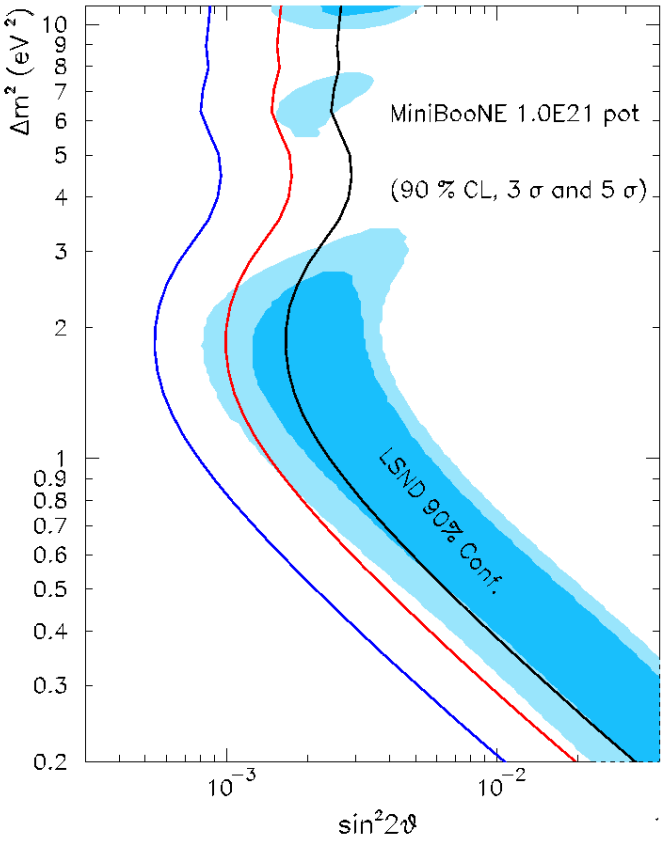

- Search for ν_e appearance in a ν_μ beam
  - L=540 m ~10x LSND
  - E~500 MeV ~10x LSND
- Aim to be definitive
  - cover LSND 90% conf region at 4-5σ
  - this needs ~10^{21} delivered protons

Beam Overview

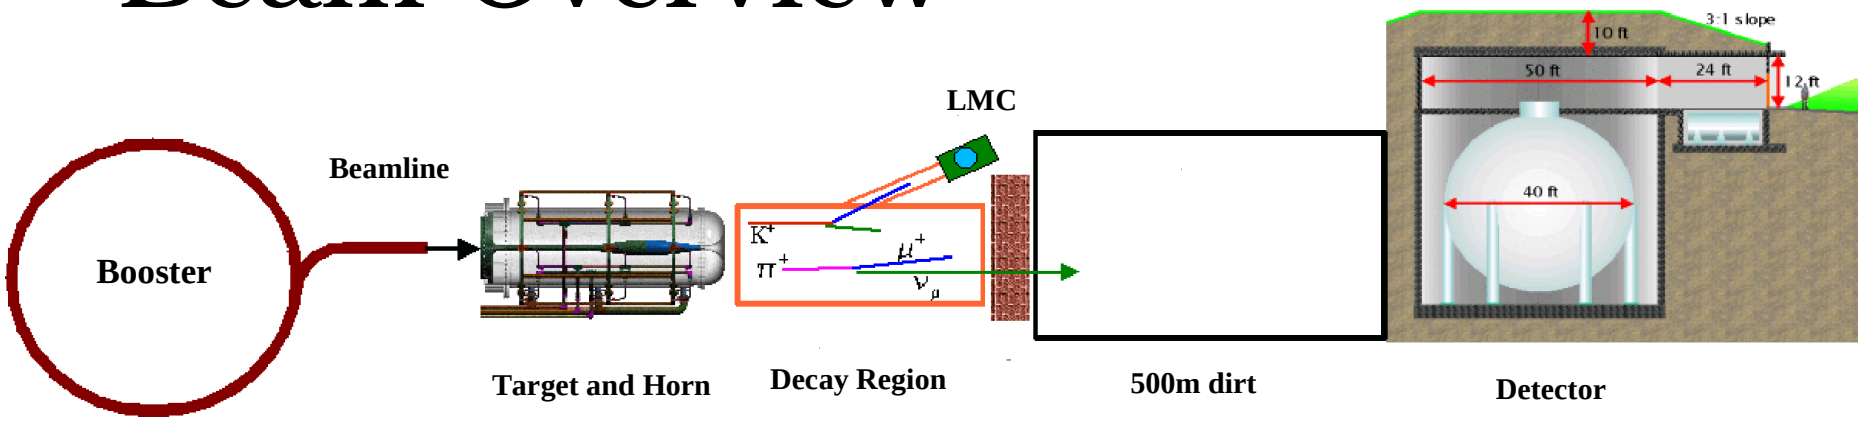

Primary Beam

- 8 GeV protons from Booster
- Into MiniBooNE beamline

Secondary Beam

- Mesons from protons striking Be target
- Focused by magnetic horn

Tertiary Beam

- Neutrinos from meson decay in 50m pipe
- Pass through 500m dirt (and oscillate?) to reach detector

Booster Performance

- In its 30 years the Fermilab Booster has never worked this hard
- Currently average …
  - ~ 6×10^{16} protons/hour
- Have reached 28% of total protons needed

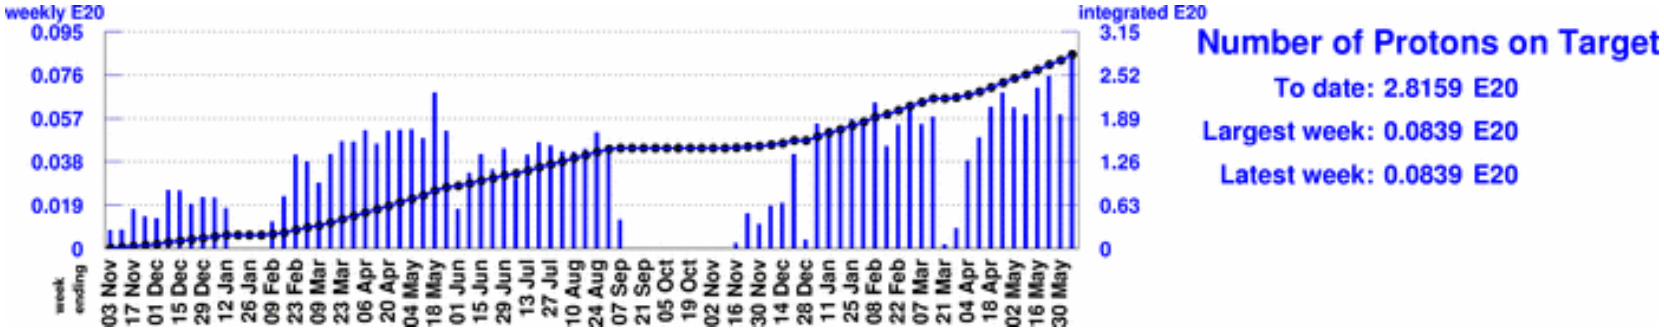

Horn, Target & Fluxes

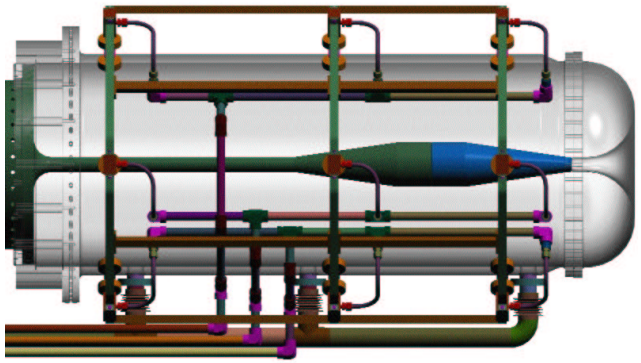

- Protons impinge on 71cm long, Be target
- Horn focusing of secondary beam increases ν flux by factor of ~5
- 170 kA pulses, 143μs long at ~5 Hz
- Has performed flawlessly with ~80 million pulses to date

- Main ν_μ flux from $\pi^+ \rightarrow \mu^+ \ \nu_\mu$
- Intrinsic ν_e flux from
  - $\mu^+ \rightarrow \nu_\mu \ e^+ \ \nu_e$
  - $K^+ \rightarrow \pi^0 \ e^+ \ \nu_e$
  - $K^0_L \rightarrow \pi^- \ e^+ \ \nu_e$
- Understand fluxes with multiple monitoring systems

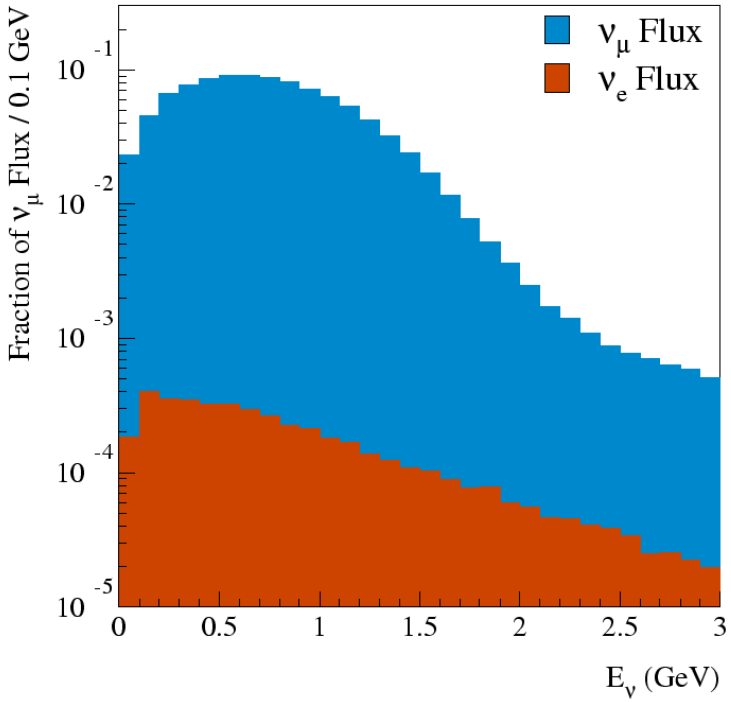

Understanding ν Fluxes (1)

- E910 @ BNL + previous world data fits
  - Basis of current MB π production model

- HARP @ CERN
  - Measure π & K production
  - 8 GeV beam
  - MB target slugs
  - thin and thick targets
  - Analysis in progress

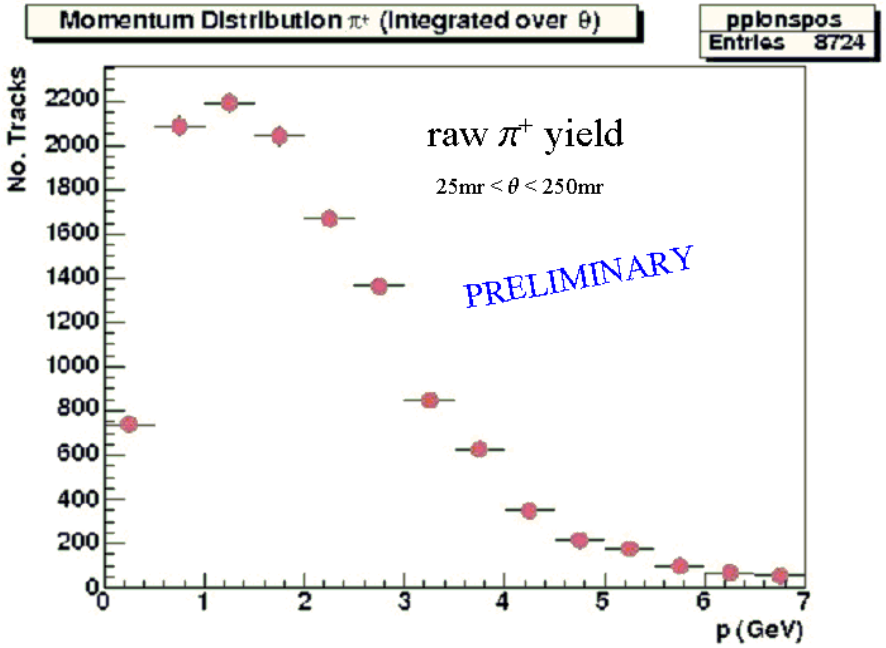

Understanding ν Fluxes (2)

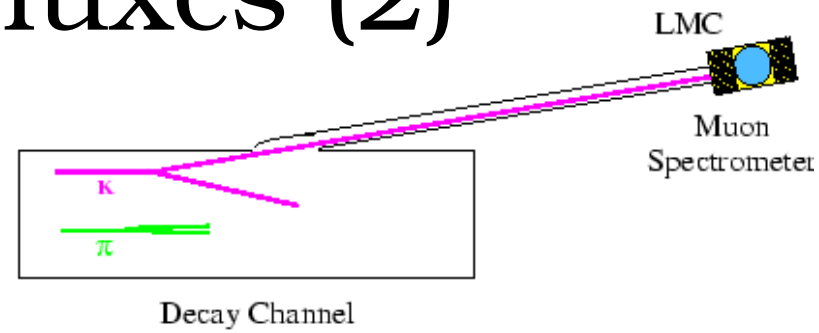

- LMC muon spectrometer
  - K decays produce wider angle muons than π decays
  - Scintillating fibre tracker 7 degrees off axis

- LMC triggered from beam-on-target signal

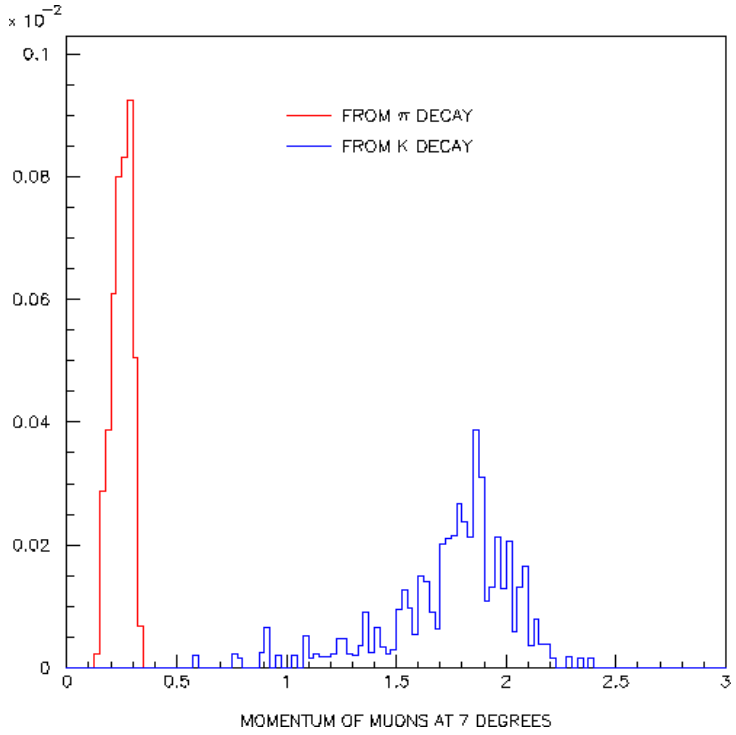

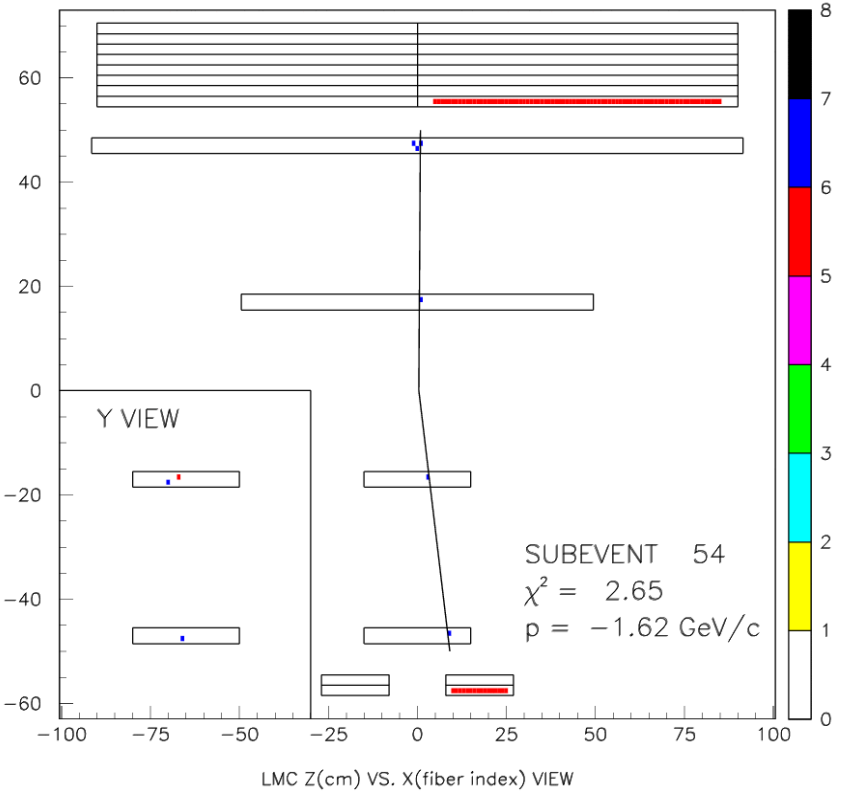

Detector Overview

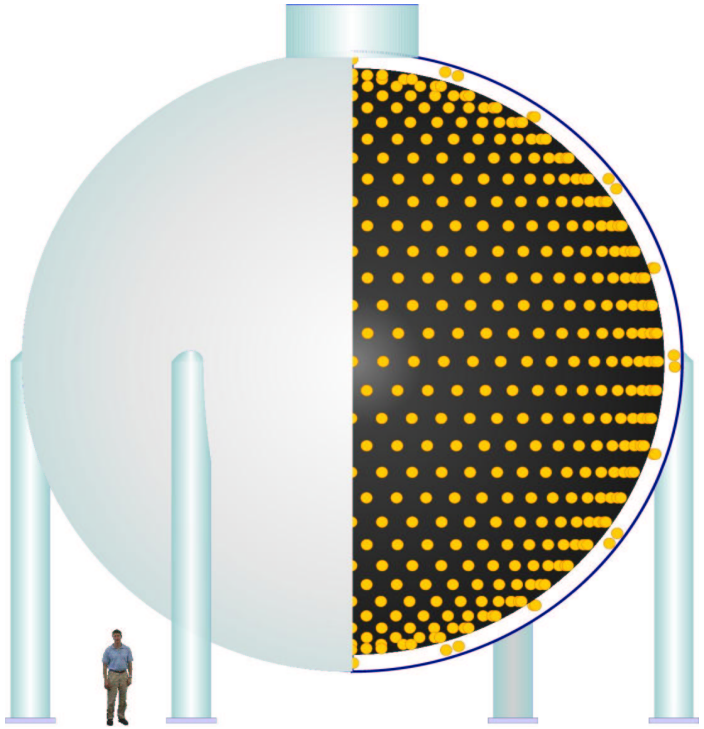

- 12m diameter sphere
- Filled with 950,000 litres of pure mineral oil

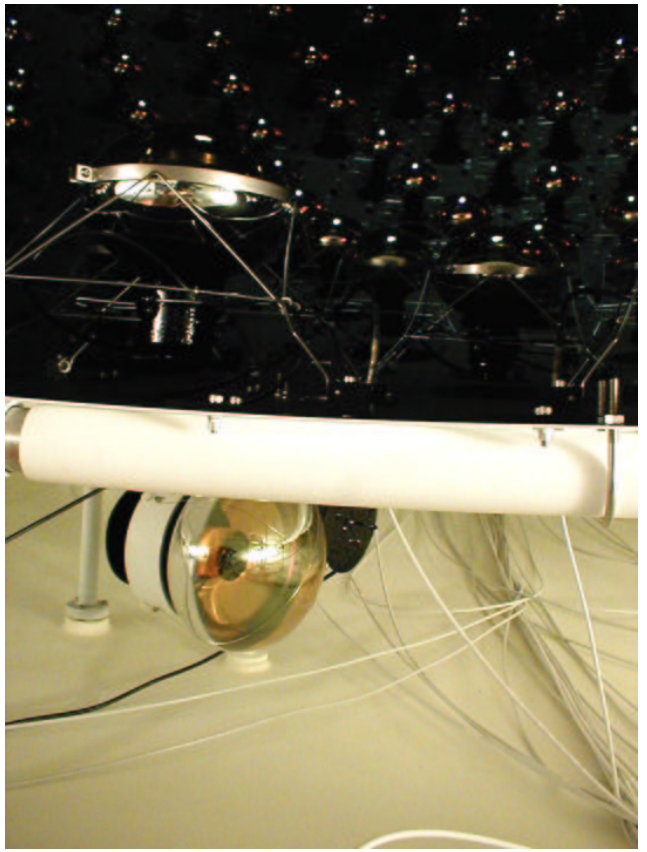

- Light tight inner region with 1280 8” PMTs (10% coverage)
- 240 PMTs in outer veto region
- Neutrino interactions in oil produce
  - Prompt Čerenkov light
  - Delayed scintillation light

Particle ID

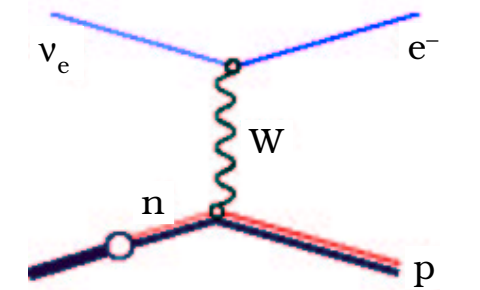

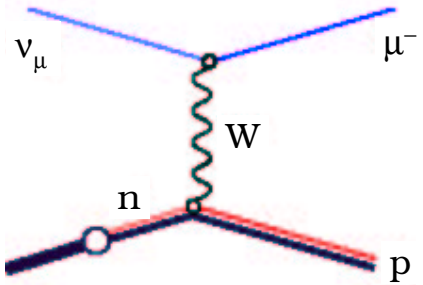

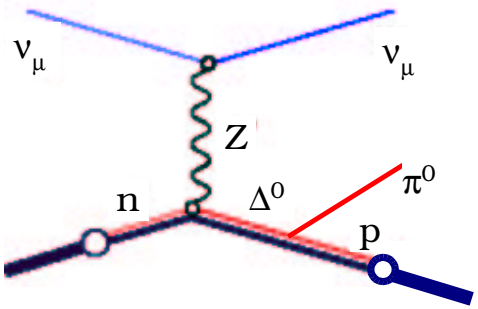







Michel e from μ decay candidate

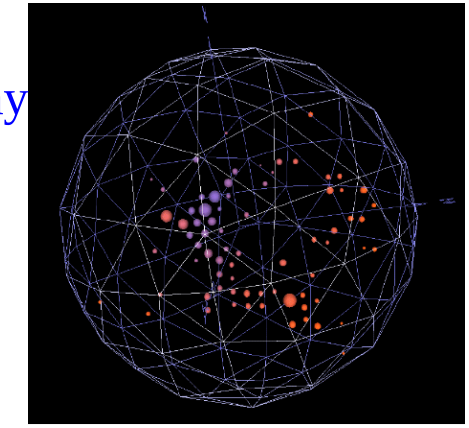

Beam μ candidate

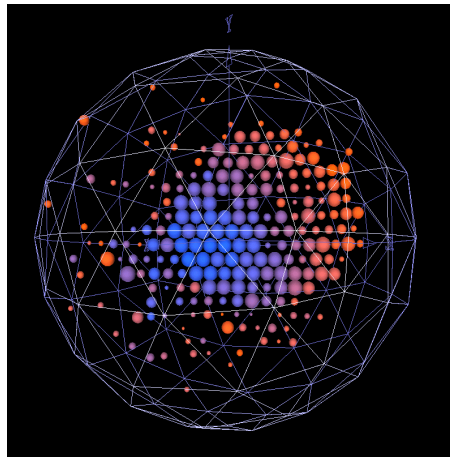

Beam π^0 candidate

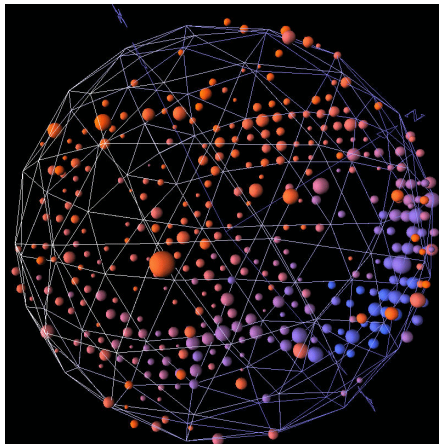

- Identify electrons (and thus candidate ν_e events) from characteristic hit topology

Neutrino Candidates

- DAQ triggered on beam from Booster
- Detector read out for 19.2 μs
- ν pulse through detector lasts 1.6 μs
- With a few very simple cuts non-neutrino/neutrino rate is ~10^{-3}

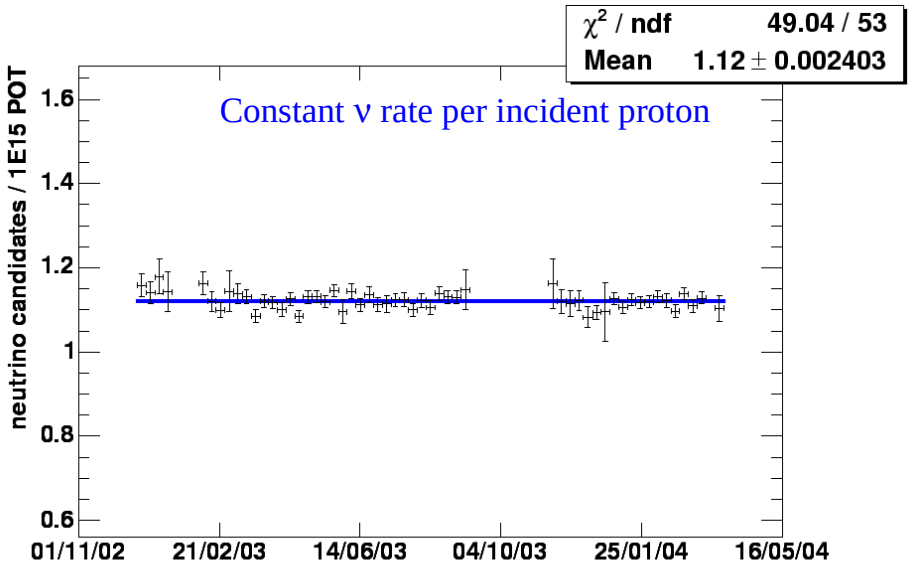

- ν event every 1.5 minutes, ~300k to date

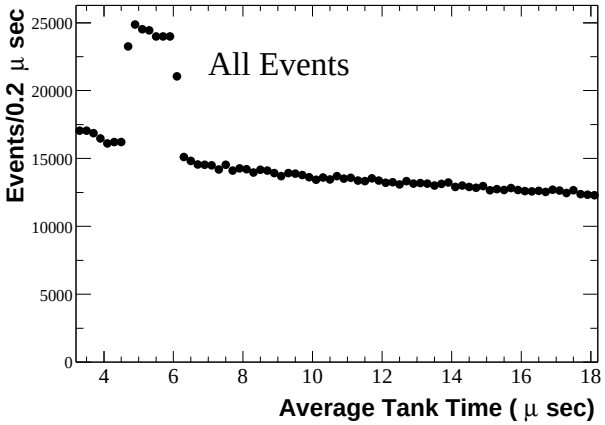

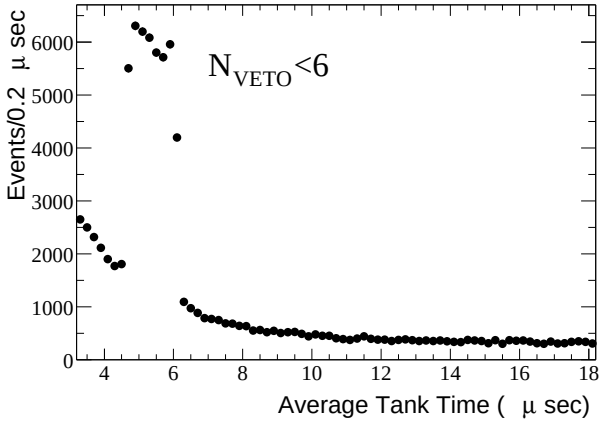

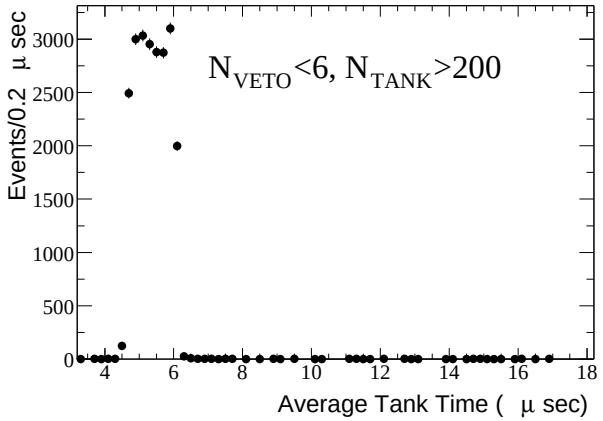

Laser Calibration System

- 4 Flasks distributed about the tank
- Measure tube charge response (needed for energy measurement)
- Measure tube timing response (needed for event reconstruction)

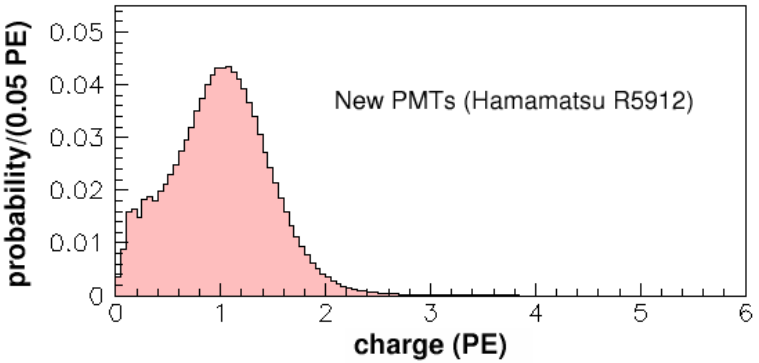

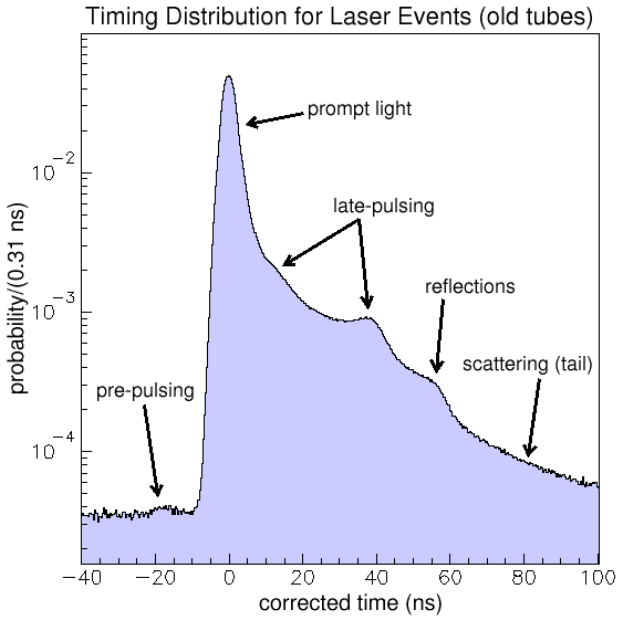

- Fully automated calibration system
- New calibration every 4 days

Optical Model

- Light Creation
  - Cerenkov – well known
  - Scintillation
    - yield
    - spectrum
    - decay times
- Light Propagation
  - Fluoresence
    - rate
    - spectrum
    - decay times
  - Scattering
    - Rayleigh (λ^4, $1+COS^2\theta$)
    - Particulate (Mie)
  - Absorption

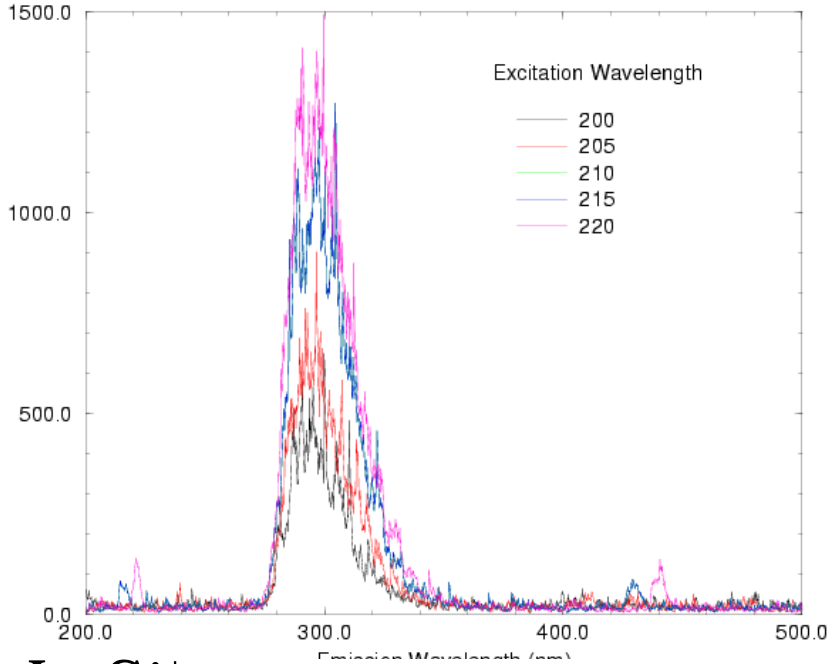

- In Situ
  - Cosmics muons, Michel electrons, Laser
- Ex Situ
  - Scintillation from p beam (IUCF)
  - Scintillation from cosmic μ (Cincinnati)
  - Goniometry (Princeton)
  - Fluorescence Spectroscopy (FNAL)
  - Time resolved spectroscopy (JHU)
  - Attenuation (Cincinnati)

Muon Tracker and Cubes

- Muon tracker system provides muons of known direction in the tank
- Key to understanding energy and reconstruction

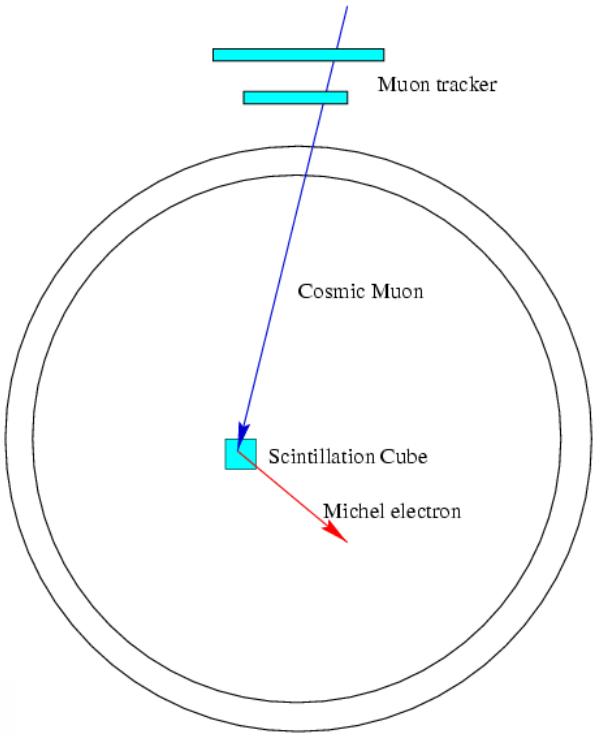



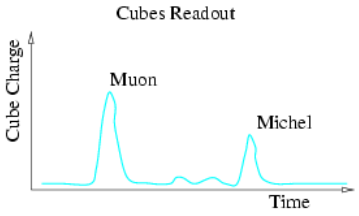

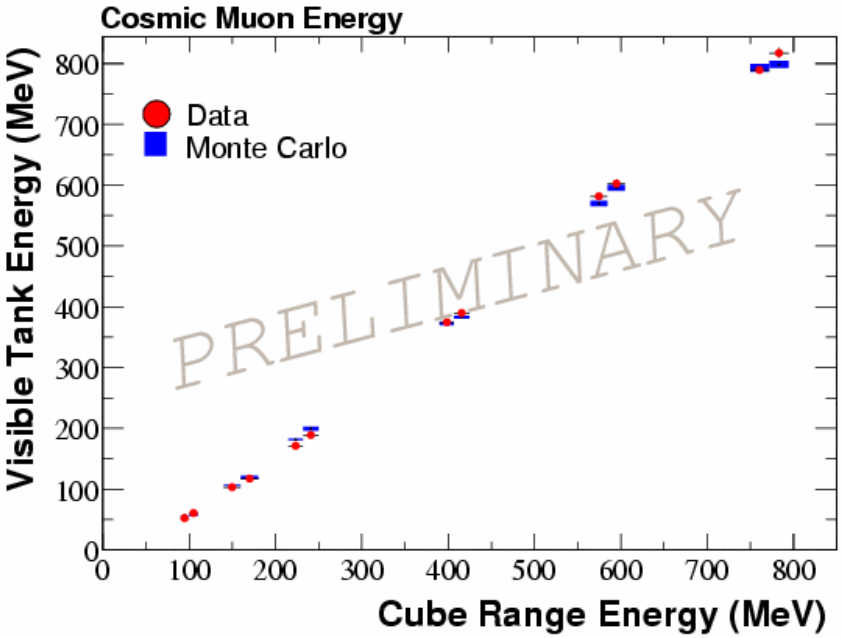

- 7 Scintillator cubes throughout the tank
- Provide muons & Michel electrons of known position

Electron Energy Response

Michel Electrons from Cosmic μ Decays

- Used to set energy scale

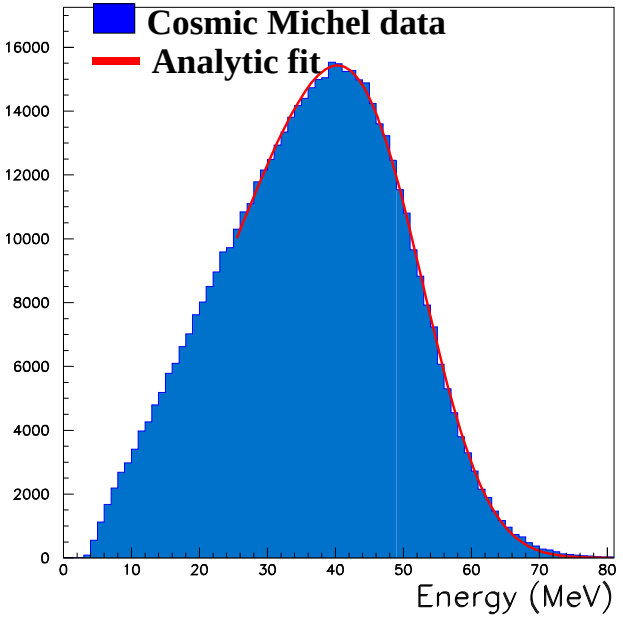

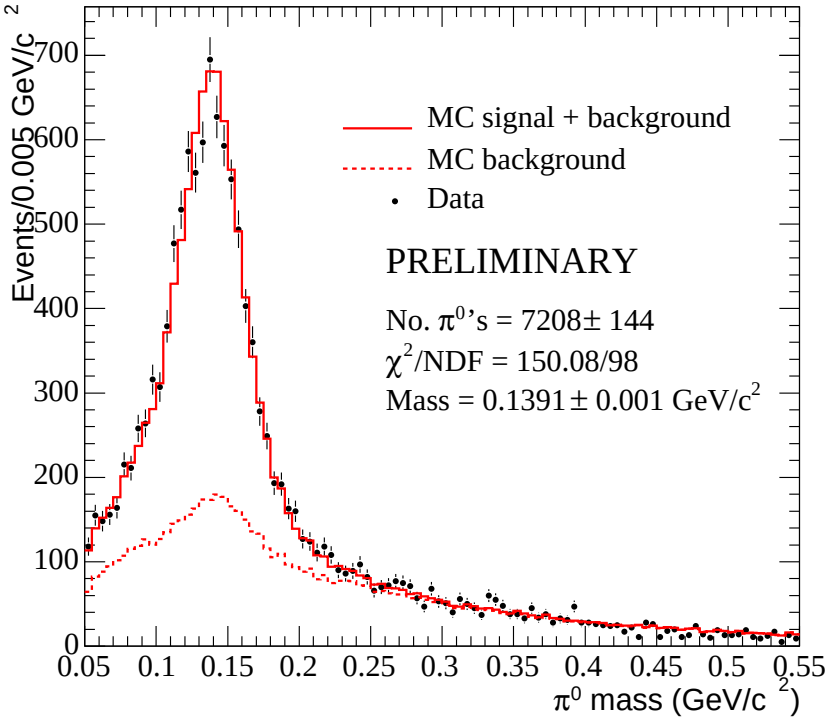

π^0 Mass Reconstruction

- In Beam Time window
- Tank hits > 200, Veto hits < 6
- In fiducial volume
- Both rings > ~40MeV and well separated

ν_μ Analyses

CC quasi-elastic

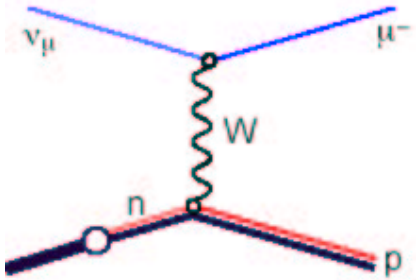

Use to understand ν_e CCQE cross-section

NC π^0 production

resonant:

$$\nu + (p/n) \rightarrow \nu + \Delta$$
$$\Delta \rightarrow (p/n) + \pi$$

coherent:

$$\nu + C \rightarrow \nu + C + \pi^0$$

background to ν_e appearance

NC elastic

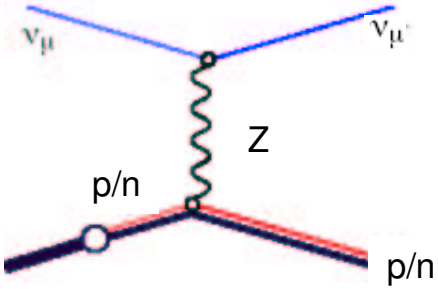

Use to understand lower vertex

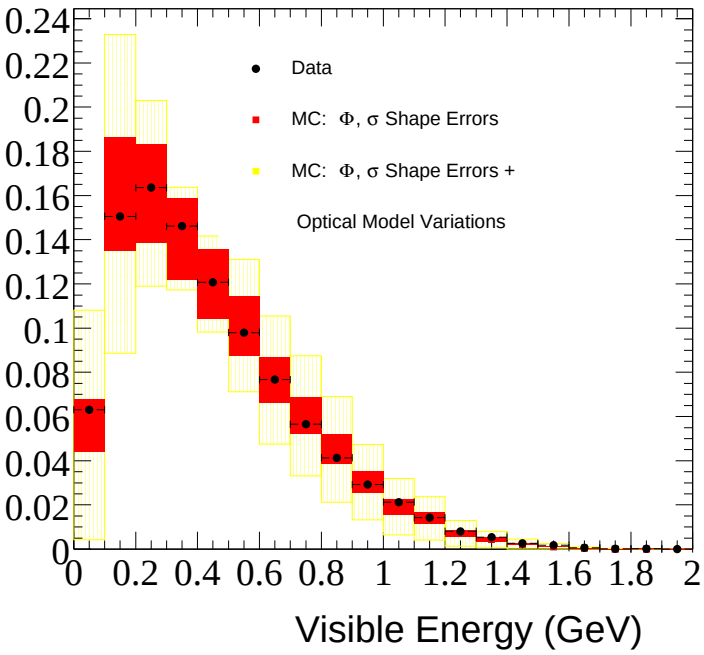

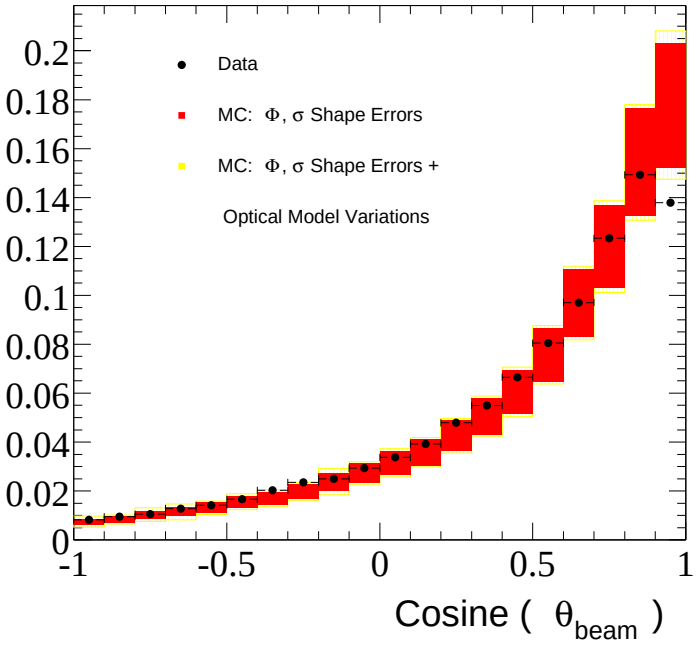



Charged Current QE

- Selection:
  - Cosmic ray cuts
  - Single μ-like ring
  - Topology
- MC & Data relatively normalized.
- Red Band: MC 1σ uncertainty from…
  - flux shape
  - cross-section
- Yellow Region: idea of variation from…
  - optical properties (atten. length, scintillation, scattering, …)

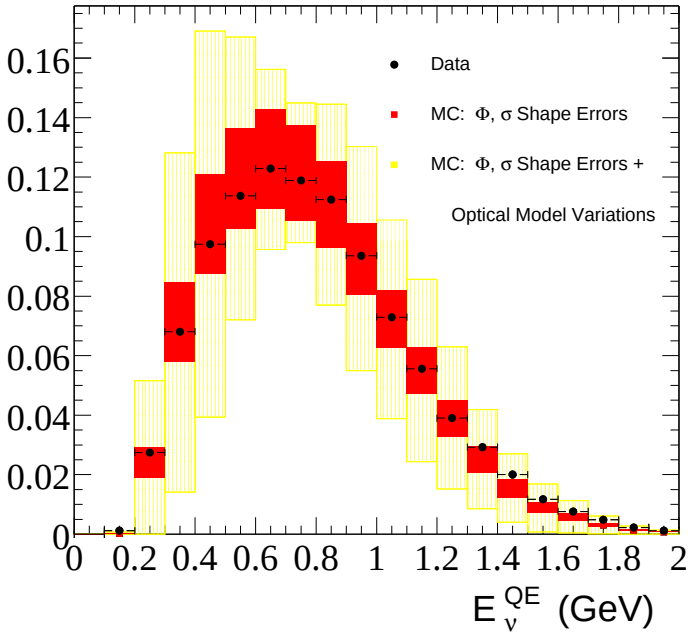

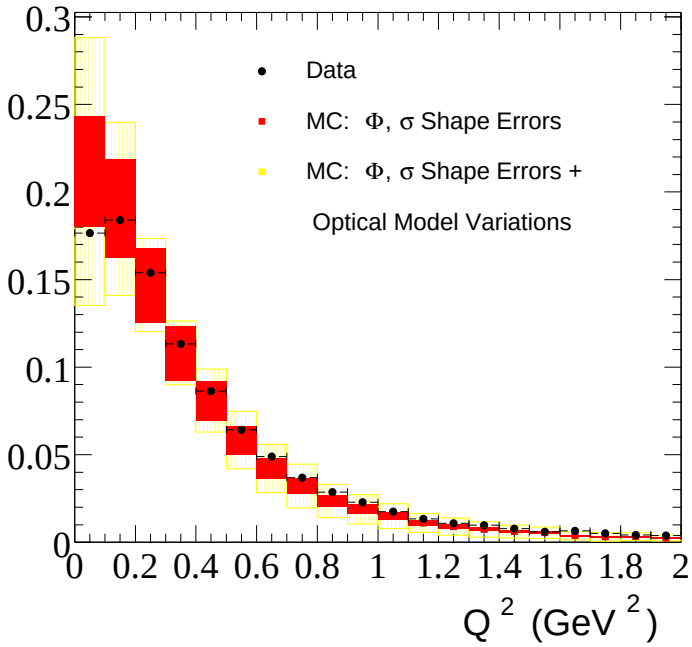

CCQE Reconstruction

- Assume:  (CCQE)

- Get E_ν^{CCQE} and Q^2 from E_μ , θ_μ

- Sensitive to ν_μ disappearance

NC π^0

- Ntank > 200, Nveto < 6, Fid.Vol.
- No Michel electron
- Clear 2-ring fit on all events
- Each ring: $E_{\gamma 1}$, $E_{\gamma 2}$ > 40 MeV.

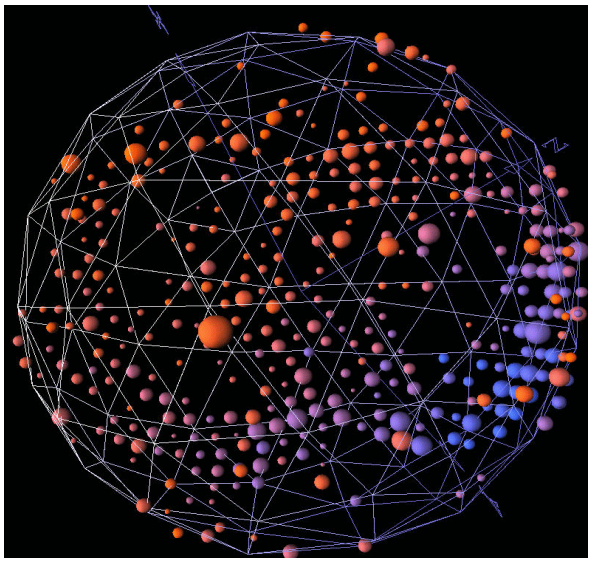

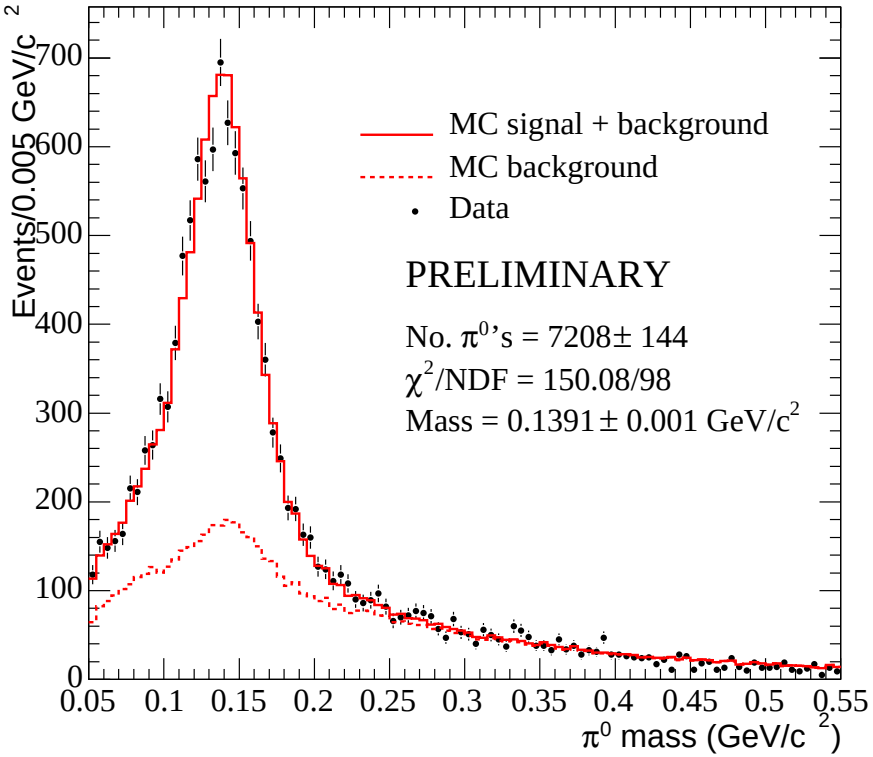

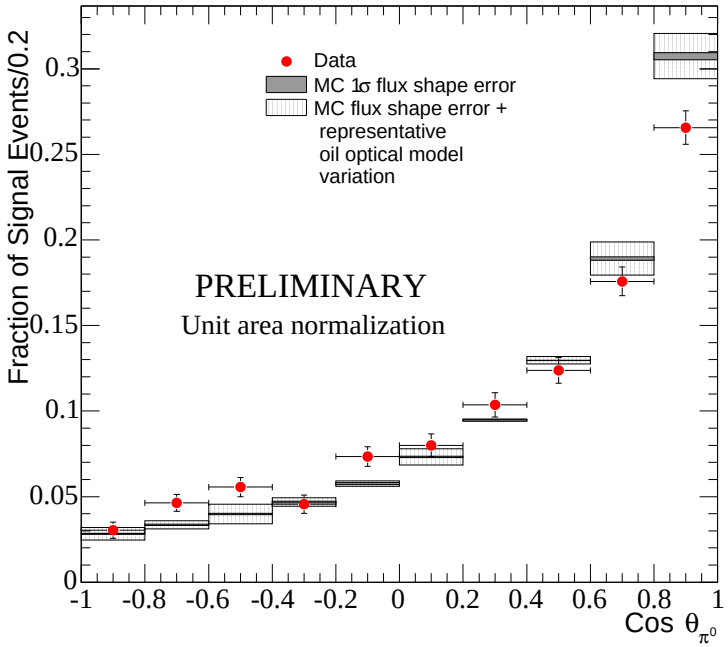

Signal yield extracted from fit with background MC.

π^0 Variables

No preferred CM γ direction, but distorted by Lab E_γ and 2 ring cuts.

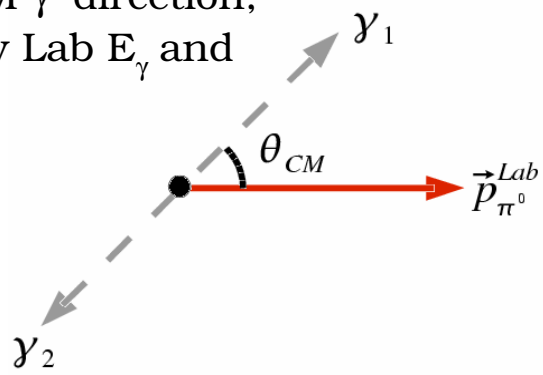

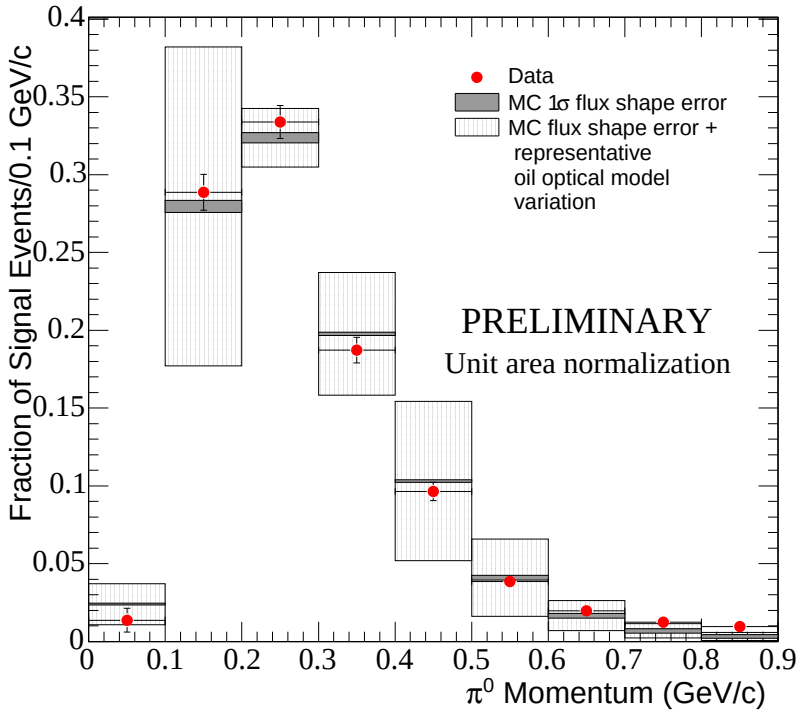

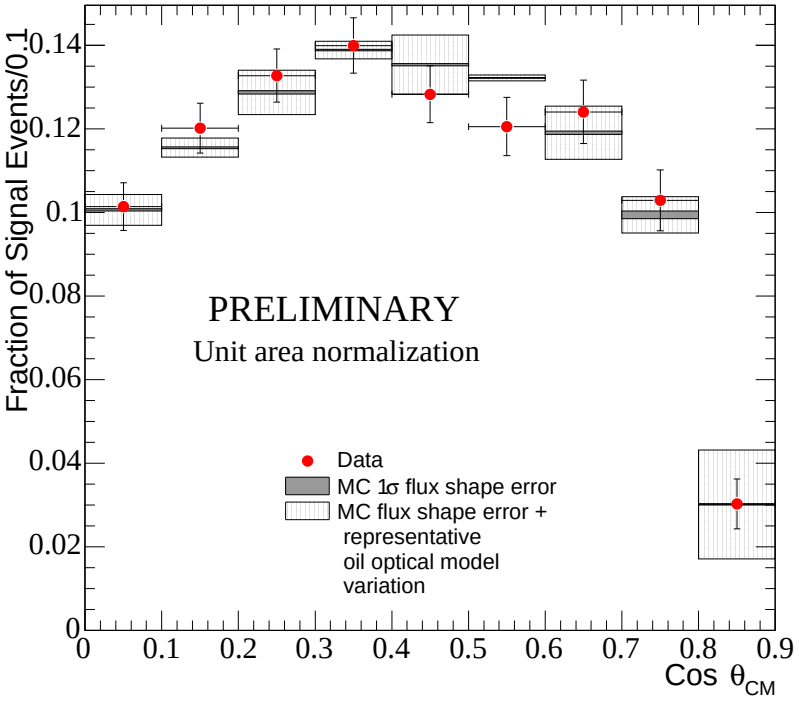

High Momentum tail

- from ν flux
- distorted by 2 ring cut

NC Elastic Scattering



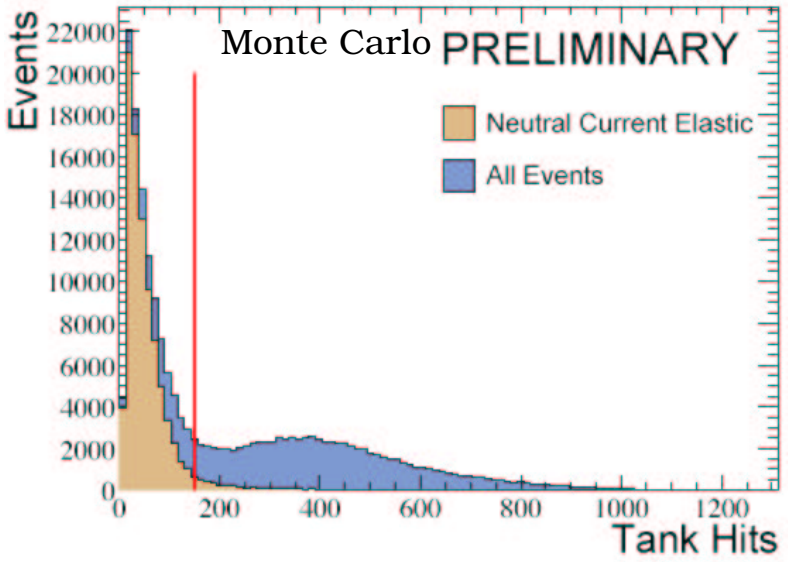

Select $N_{TANK} < 150$

$N_{VETO} < 6$

clear beam excess

use random triggers to subtract non-beam background

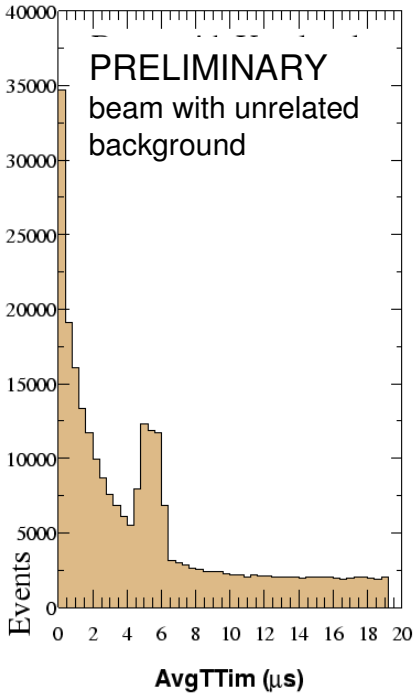

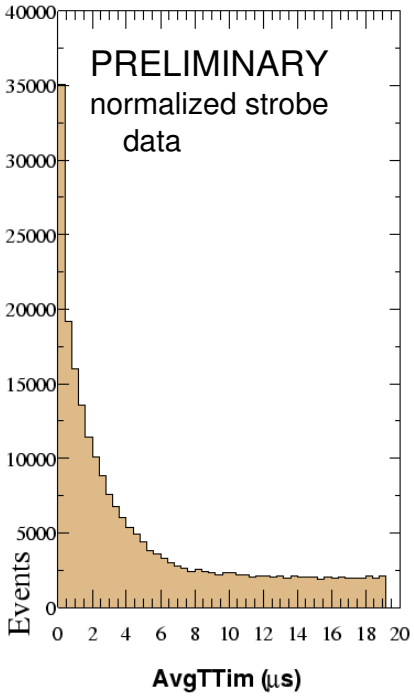

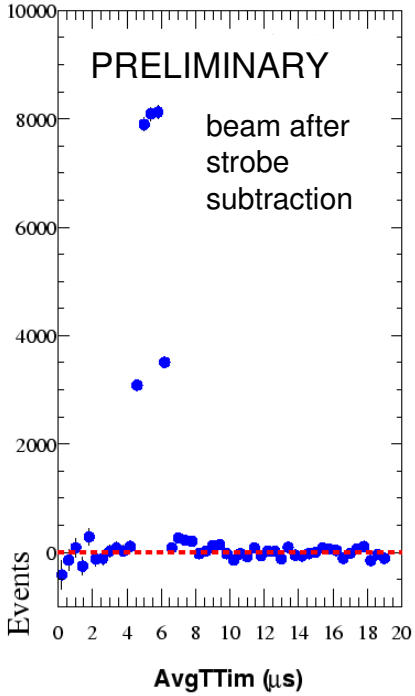

Updated Appearance Sensitivity

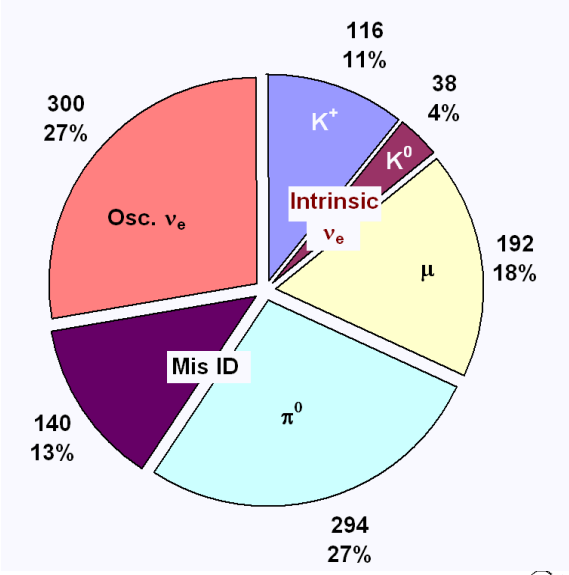

- ν_e signal and background breakdown

- ν_e signal events
- NC π^0 misIDs
- Beam ν_e events

- Reasonable signal separation with 10^{21} POT

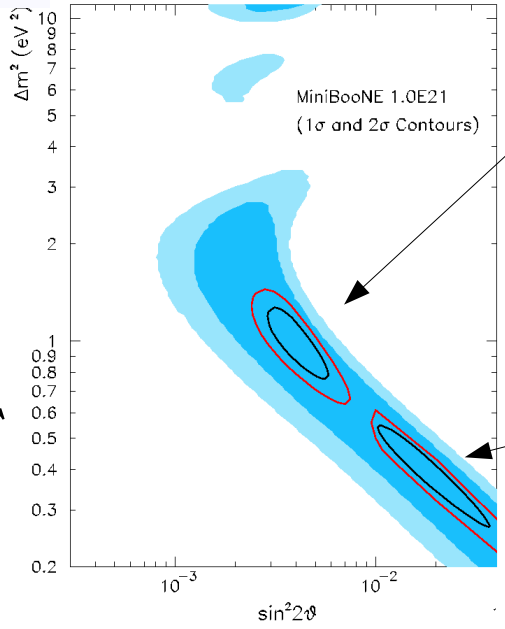

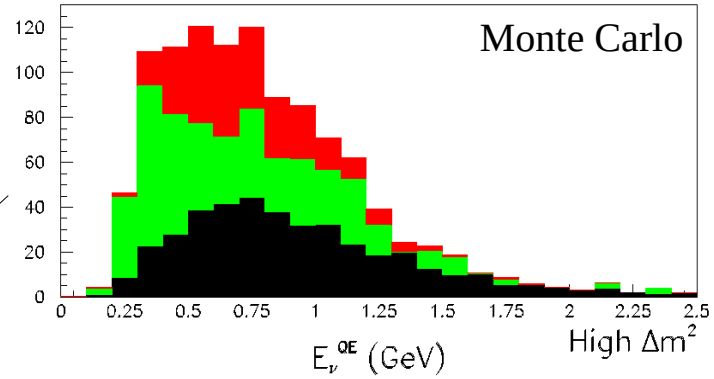

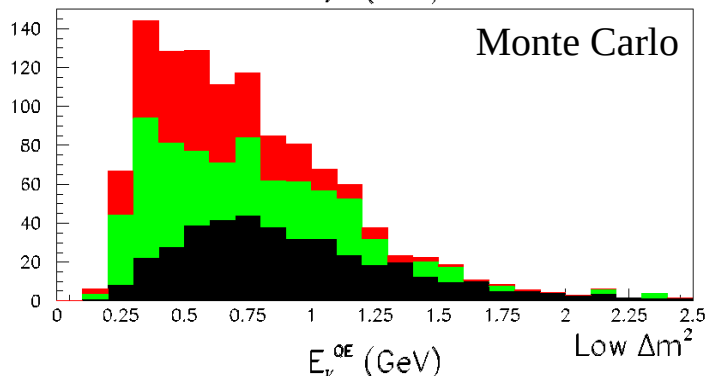

Summary

- All hardware systems working well
- We're at 28% of 10^{21} protons on target
- Already amassed world's largest ν dataset in ~1GeV range
- Sample of neutrino physics shows that reconstruction and analysis algorithms are working well

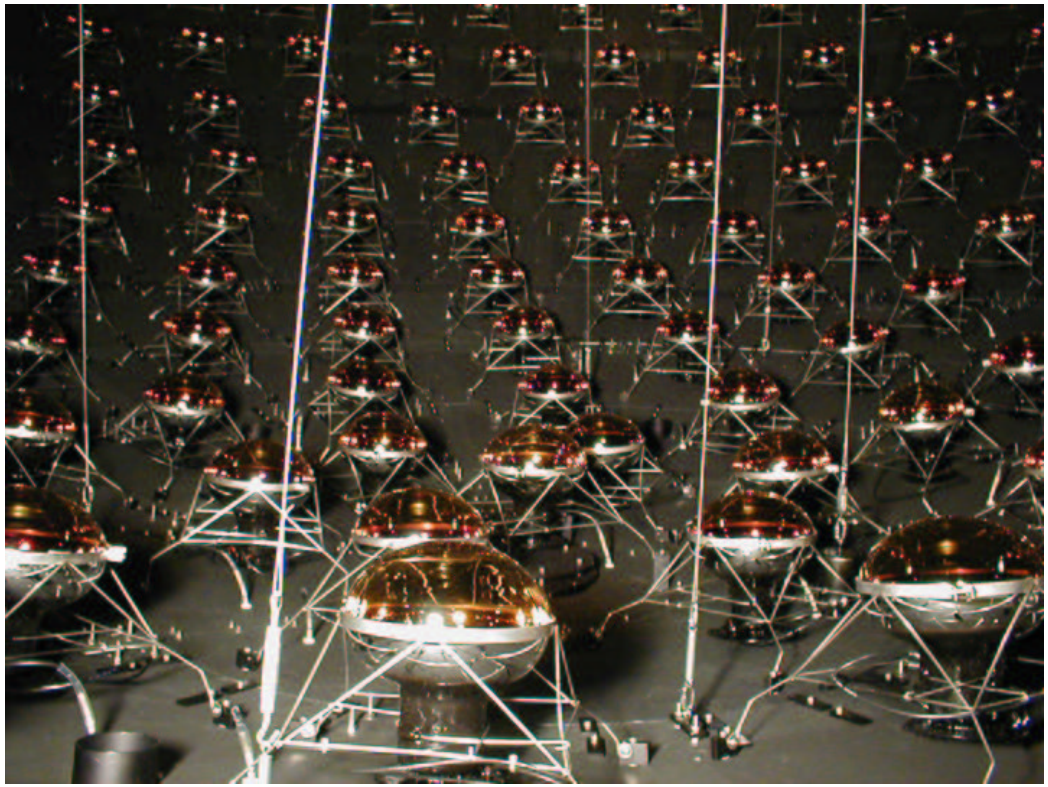

- ν_e appearance analysis should be ready in time for 10^{21} POT. Hopefully in 2005

The LSND Result

- LSND:
  - Excess of $\bar{\nu}_e$ events in a $\bar{\nu}_\mu$ beam
  - 87.9 ± 22.4 ± 6.0 over background
  - ~4σ evidence for ν oscillation

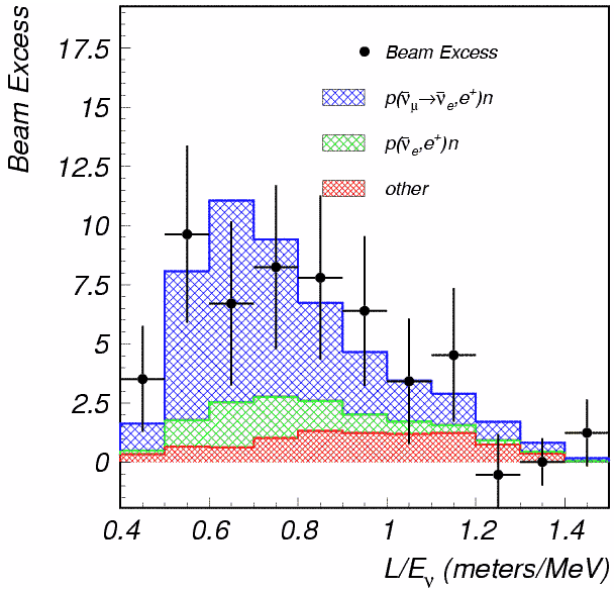

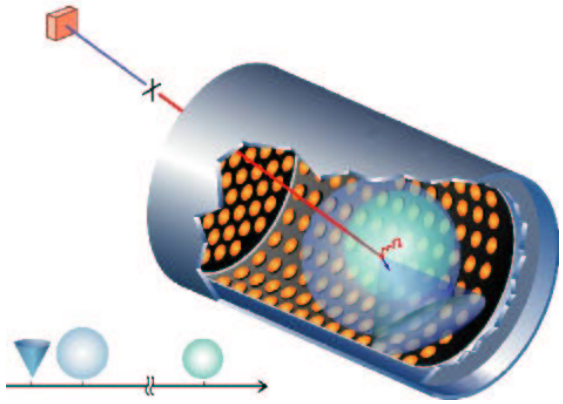

Signal: $\bar{\nu}_e\, p \rightarrow e^+ n$

$n\, p \rightarrow d\, \gamma(2.2\text{MeV})$

- To Check LSND you want
  - Experiment with
    - different systematics
    - higher statistics
    - similar L/E
- → MiniBooNE

MiniBooNE Beamline

- Beamline works well
- Beamline modelling works well

- Phase I beam (intermediate dump)
  - April 29 2002
- Phase II beam (multiwire instead of target)
  - June 26 2002
- Phase III beam (final configuration)
  - August 24 2002

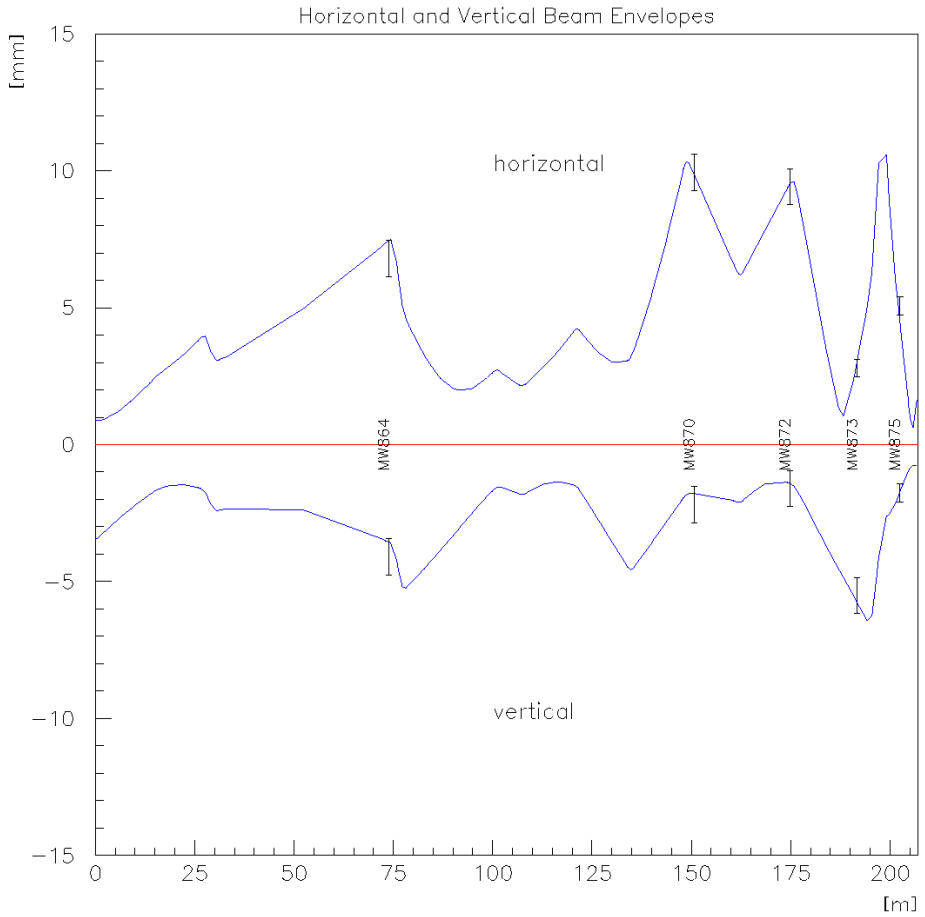

Detector Images

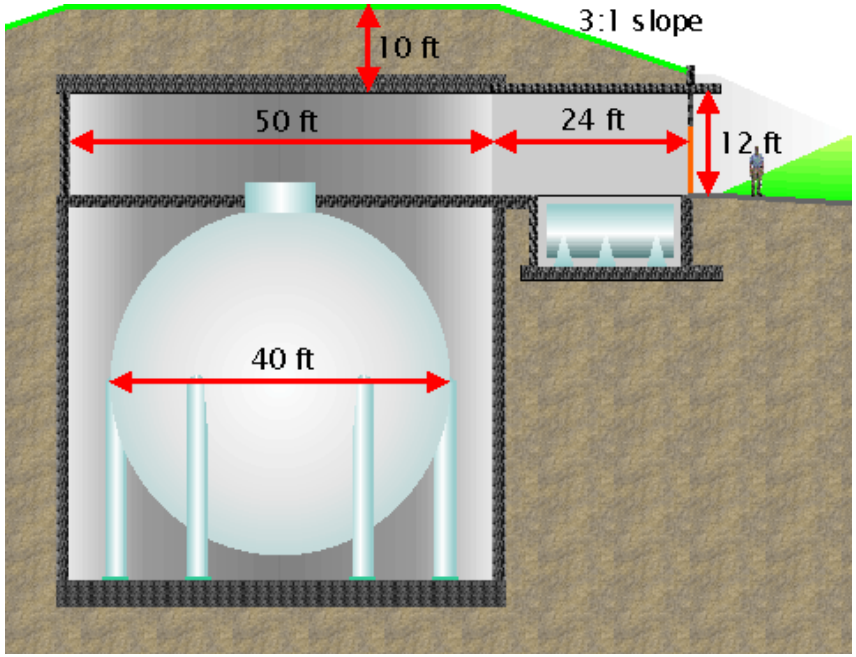

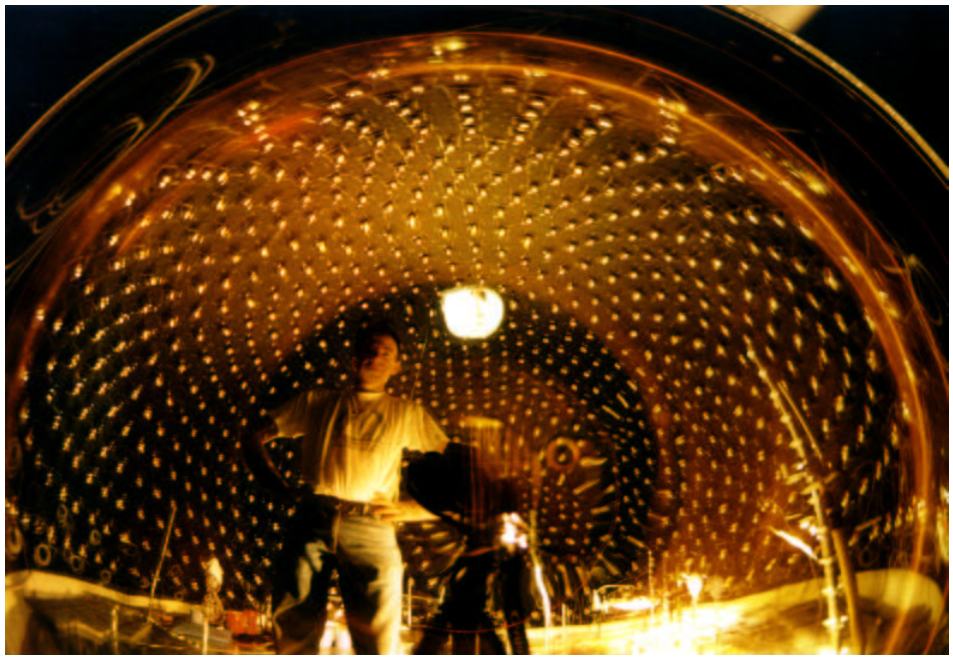

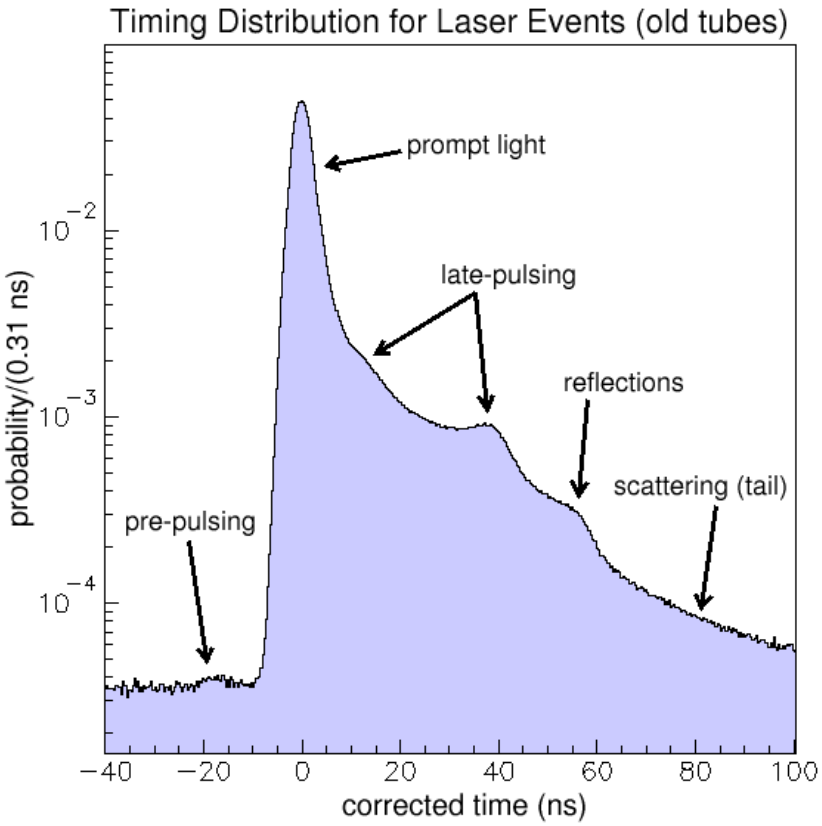
Timing Distribution for Laser Events (old tubes)
prompt light
late-pulsing
reflections
scattering (tail)
pre-pulsing
probability/(0.31 ns)
10^{-2}
10^{-3}
10^{-4}
−40
−20
0
20
40
60
80
100
corrected time (ns)

Fine Beam Event Timing

- A resistive wall monitor measures the beam time profile just before the target
- Discriminated signal sent to DAQ for fine timing

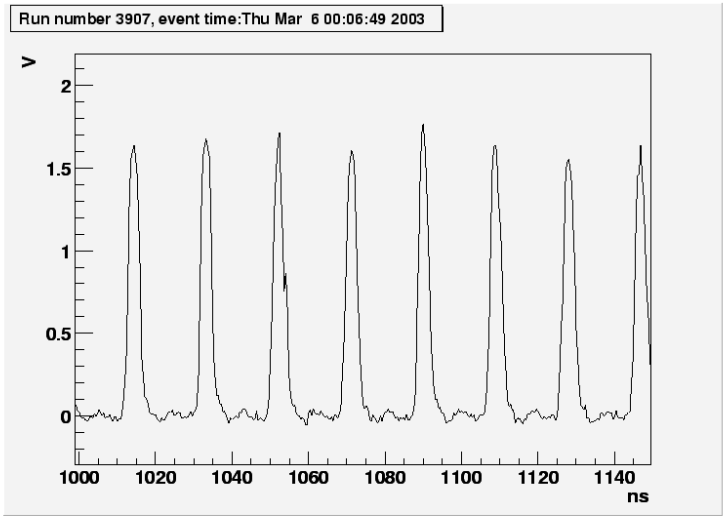

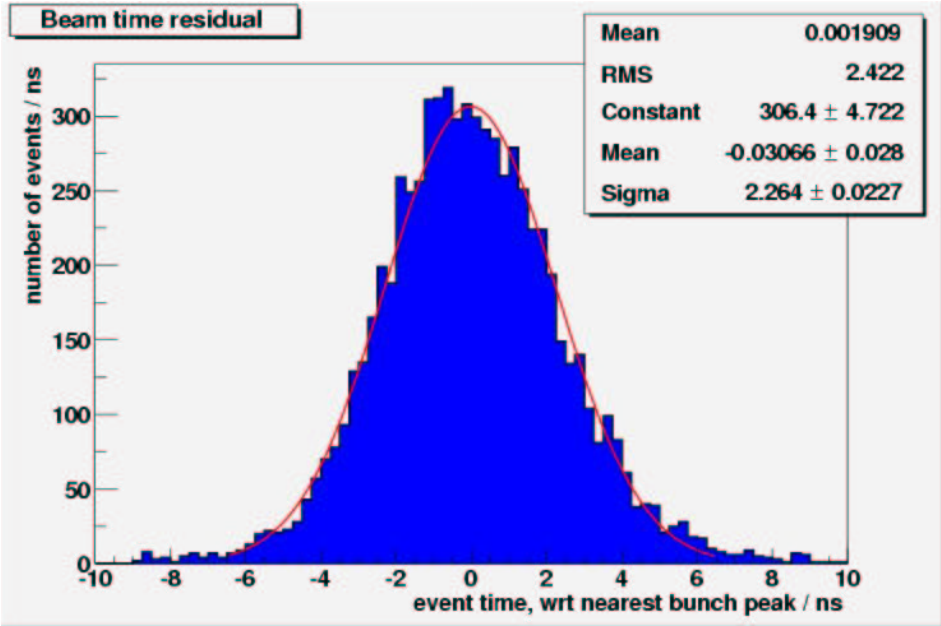

With …

- Fitted event position
- Fitted event time
- RWM timing pulse

we measure the booster bunch timing….

in neutrinos!

Reconstruction: Event Position

- Fitted position of the centre of the event track
- Cuts:-
  - Tank hits > 200
  - Veto hits < 6
  - Fit radius < 500cm
- Cartesian coordinates scaled to give equal volume slices in a sphere

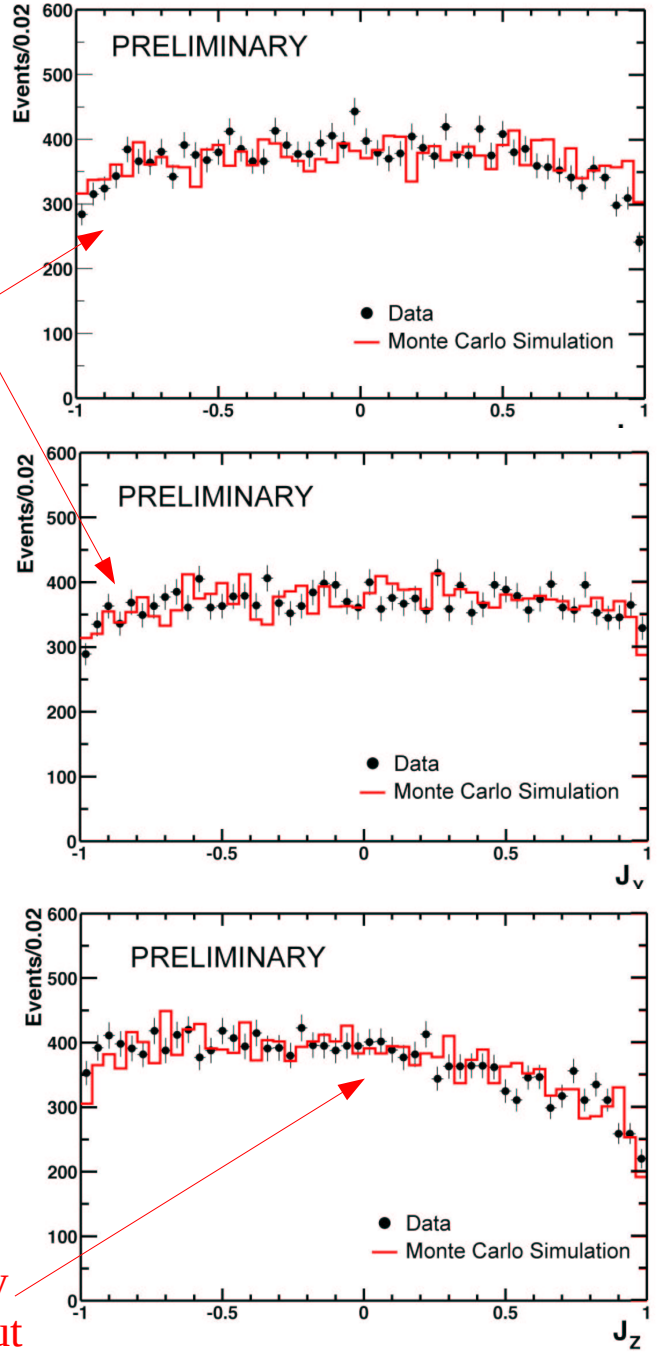

Rolloff at edges from veto cut

Asymmetry from anisotropy of event directions + veto cut

Event Displays

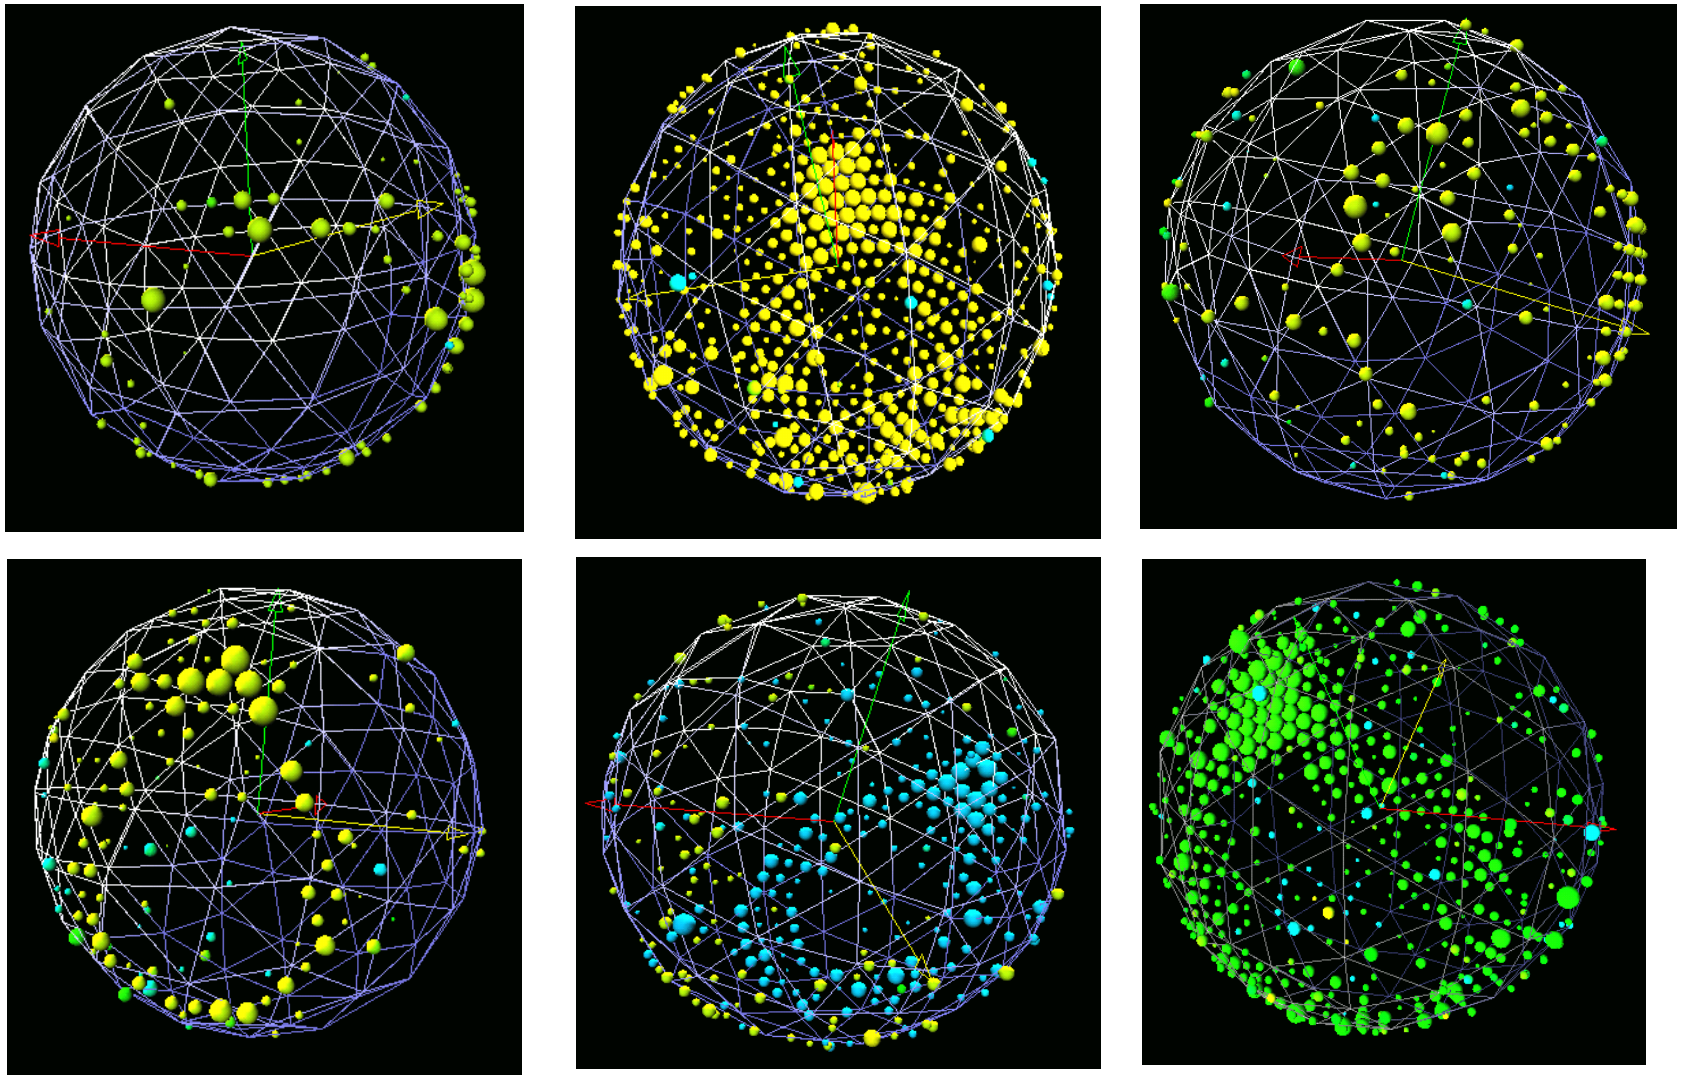

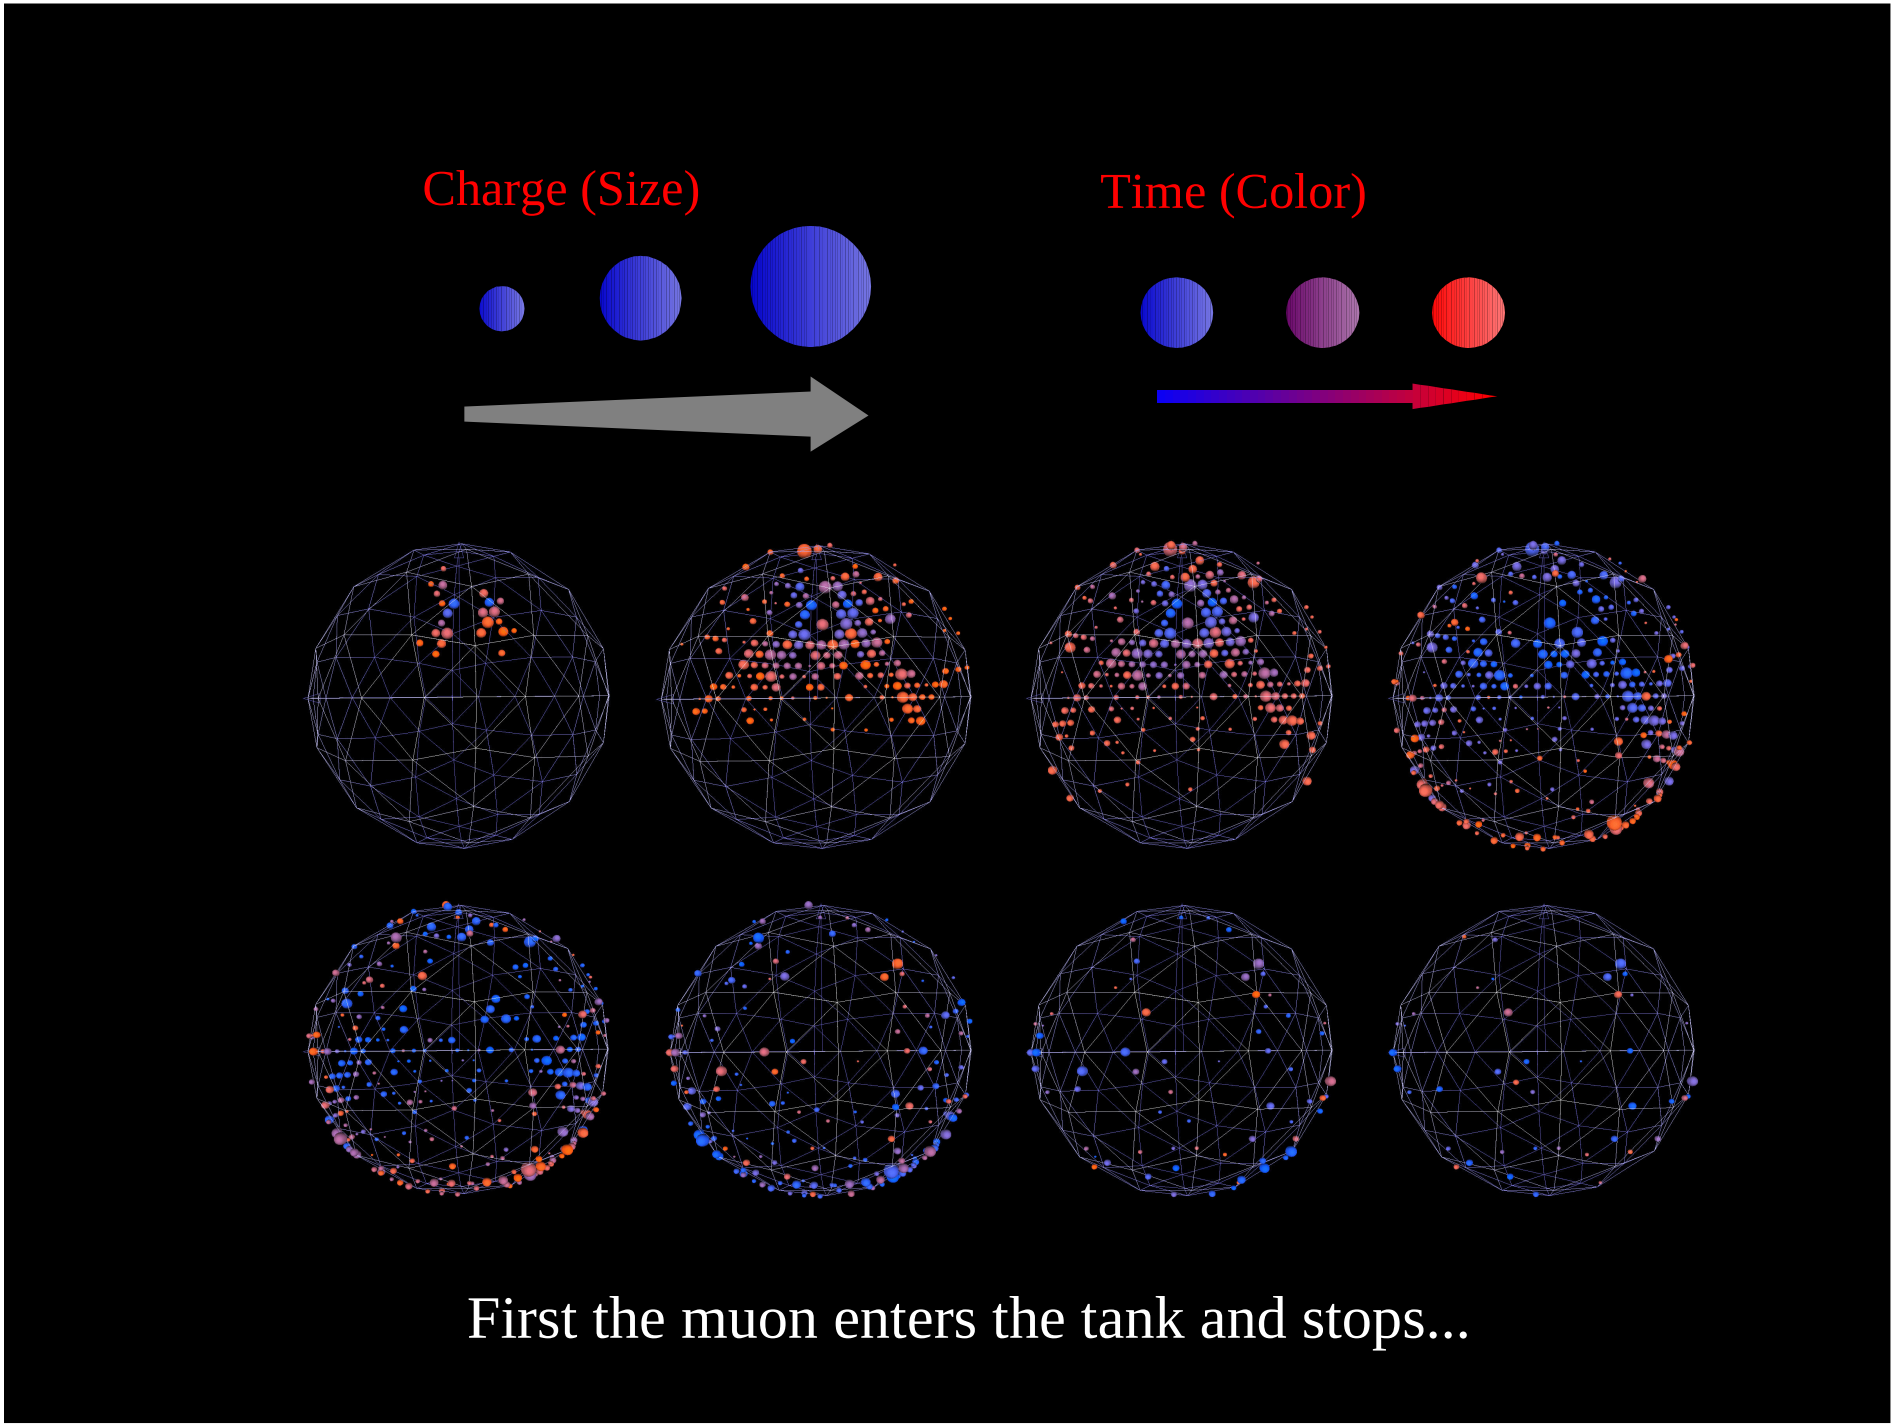
Charge (Size)
Time (Color)
First the muon enters the tank and stops...

...Then the Michel electron is observed

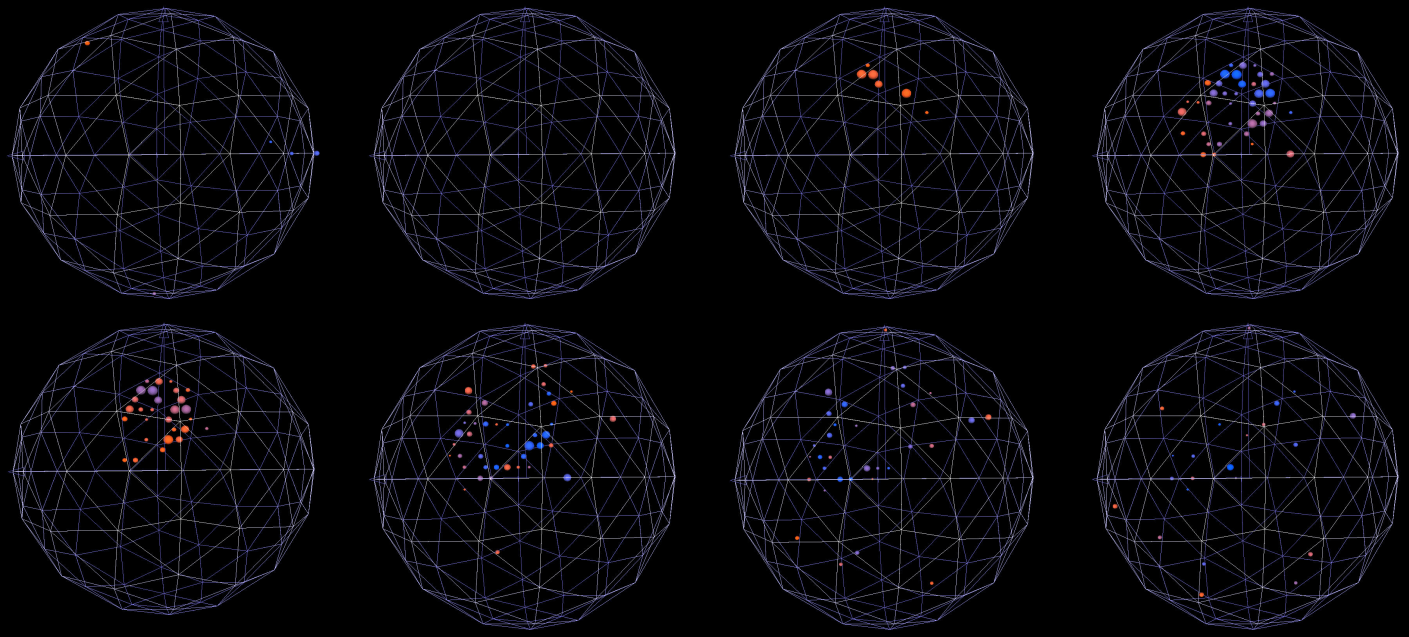

- Muons provide high energy calibration
- Michels provide low energy calibration